









Color range	5
New color range	33
Grades of wood	34
Hardwood floorboards	36
Chevron parauet	38



ELITE

Color range	42
Grades of wood	42
Hardwood floorboards	57
Chevron parquet	58



Color range 60 New color range 86 Grades of wood 87

Solid floorboards

Chevron parquet

90

92





Wide product range: engineered plank parquet, solid and engineered floor-boards, chevron parquet.

A wide range of colors, decors and types of treatment – more than 50.

Popular sizes, suitable for both large and small spaces.


High quality finishing: UV-varnish, UV-oil or natural oil.


Operational stability.

The durability and maintainability.





COLOUR

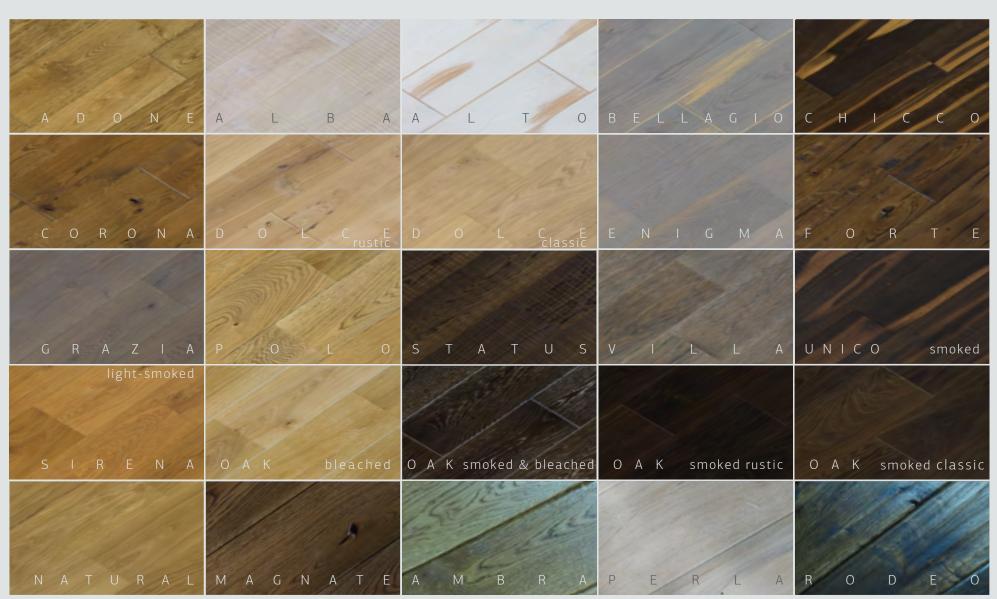

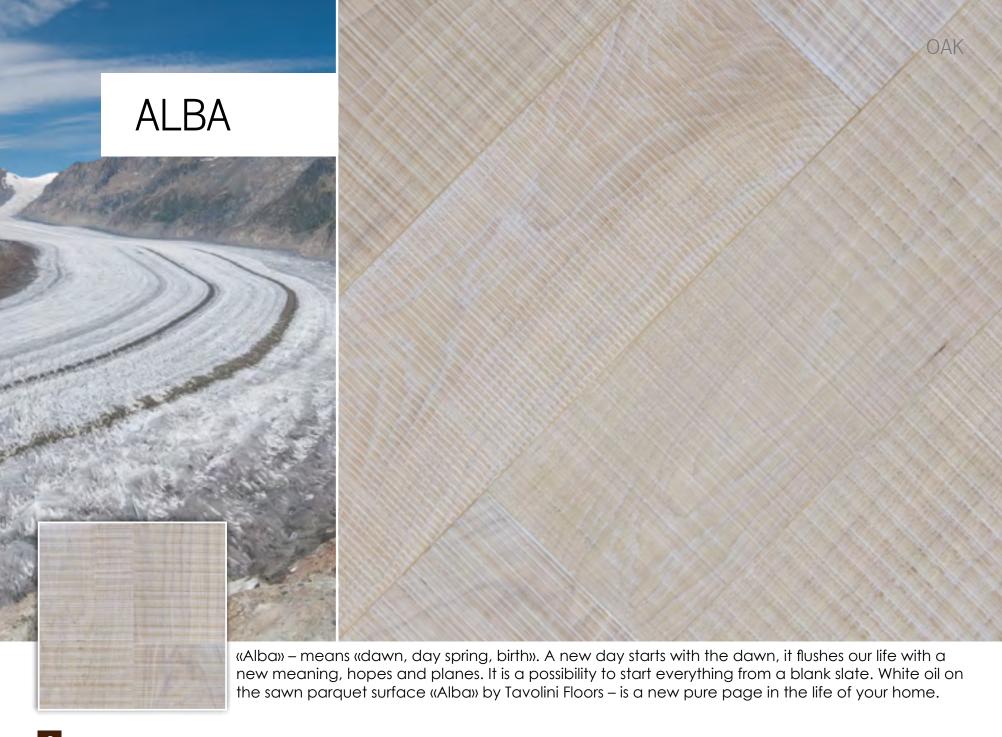




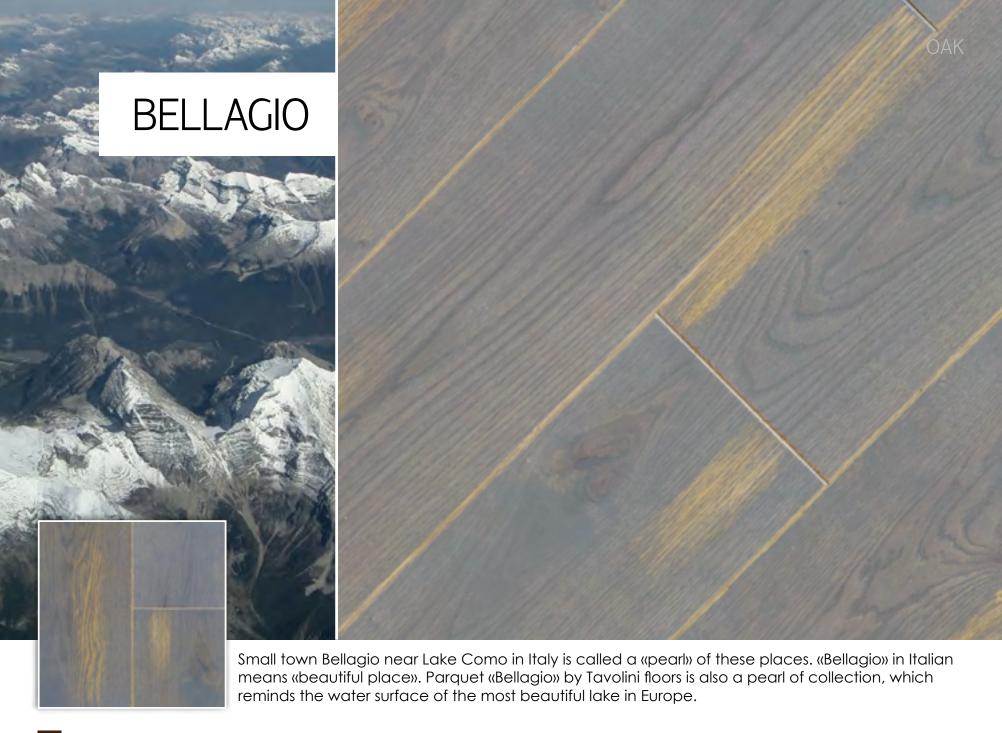

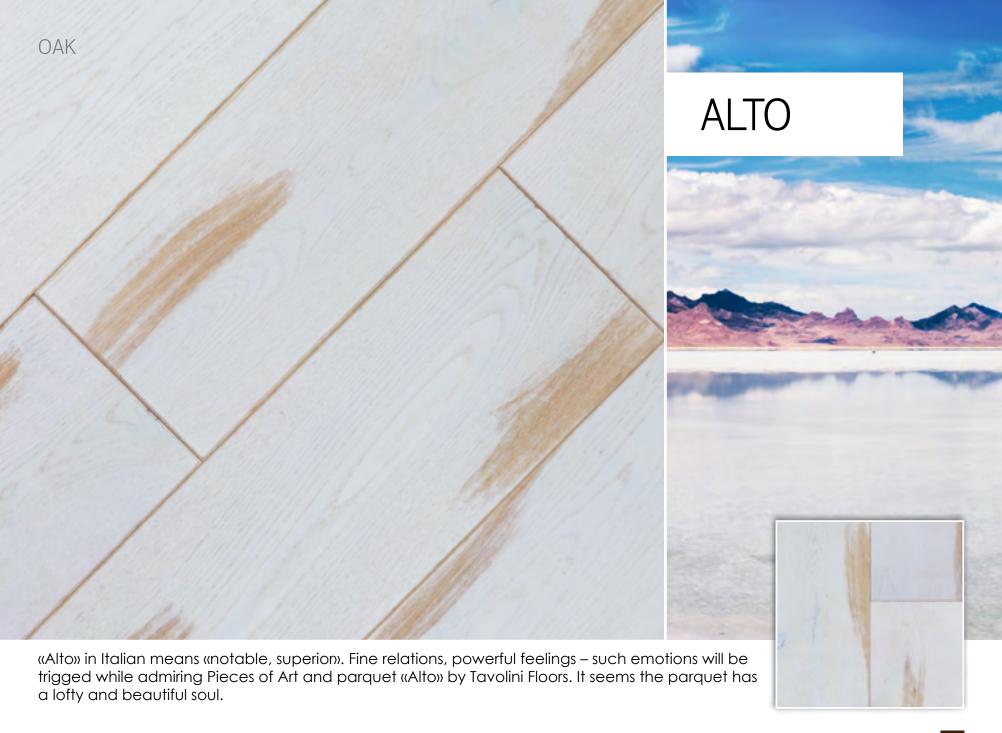




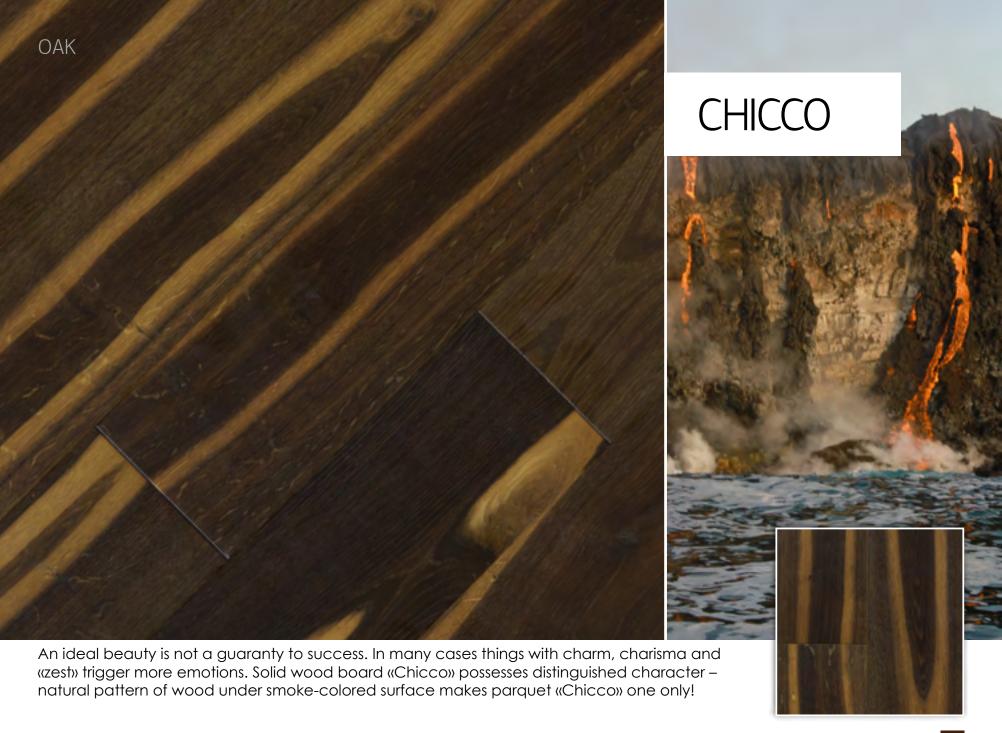










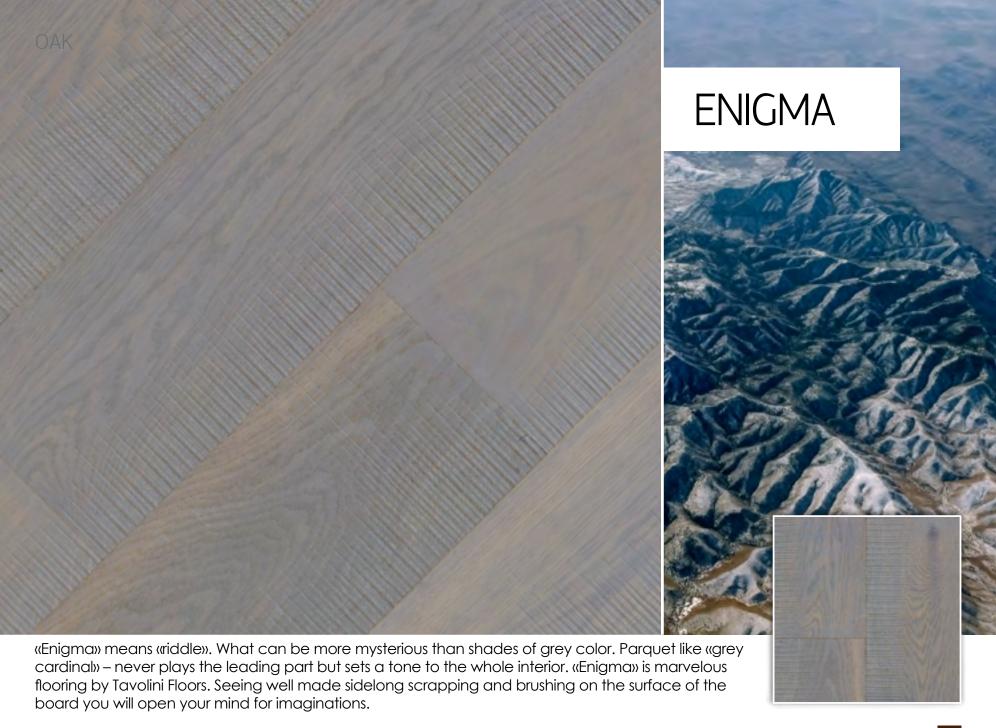


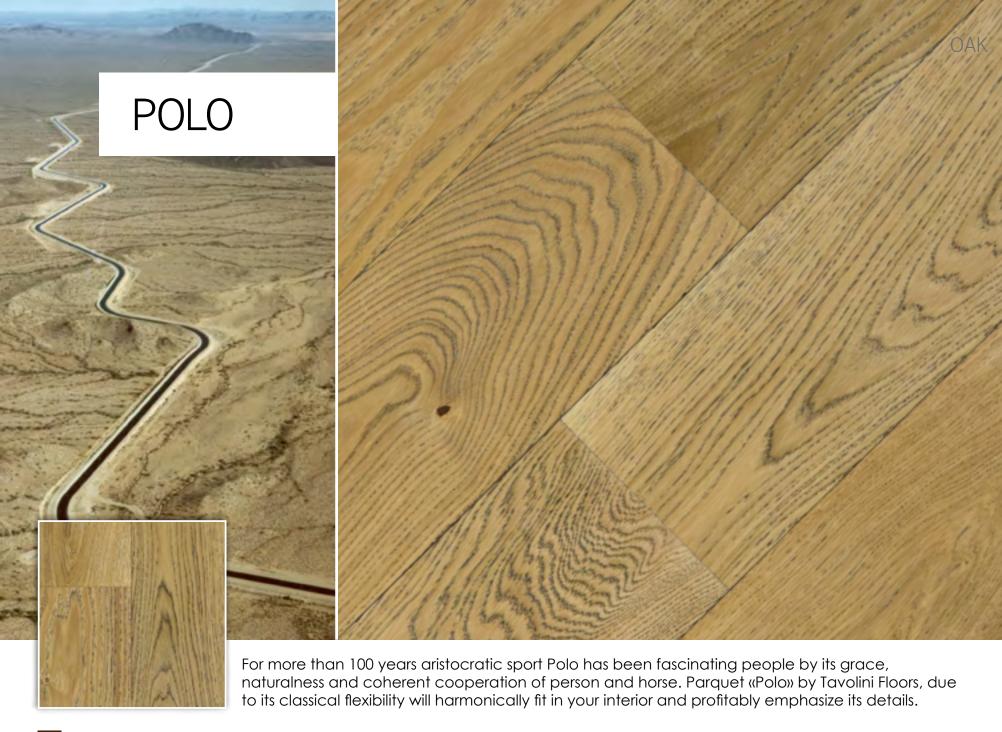

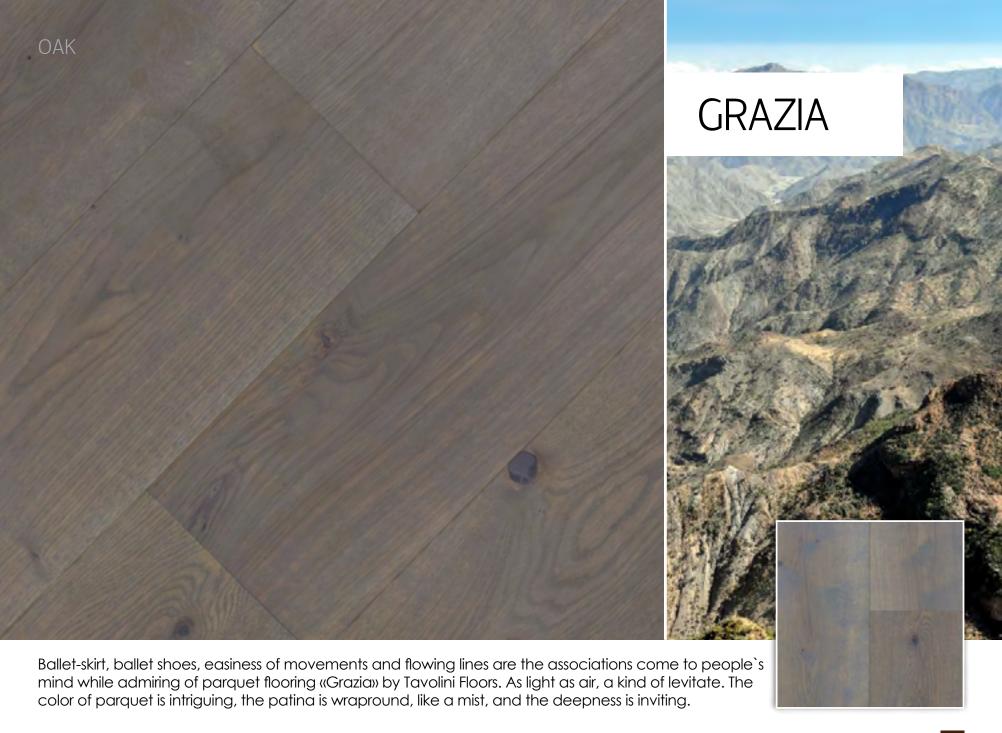

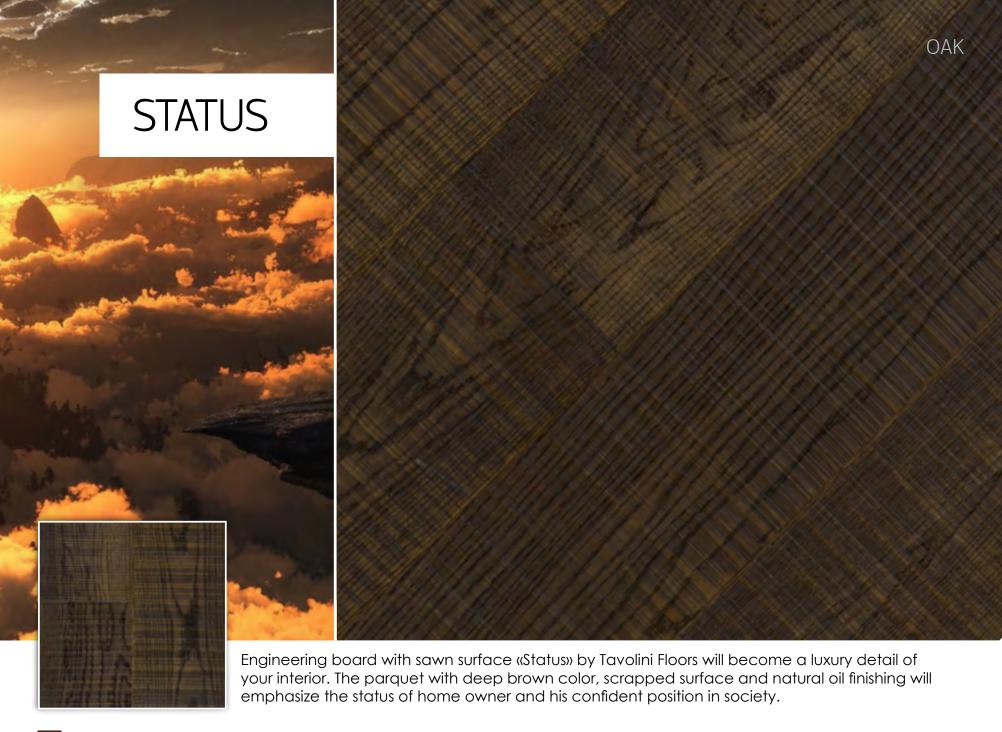





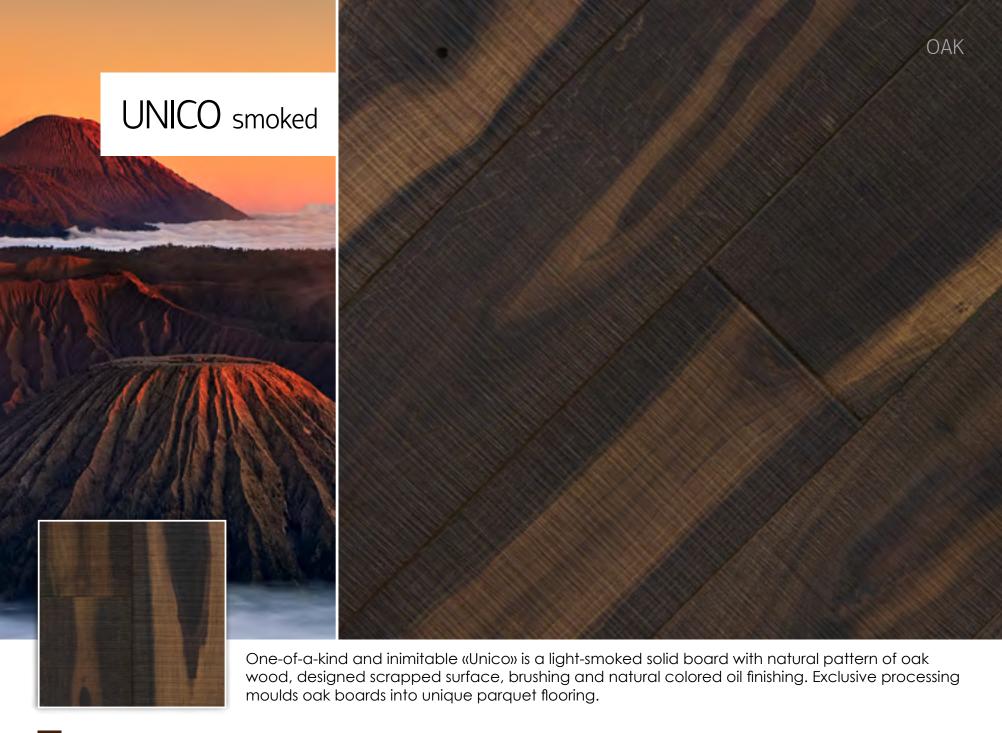





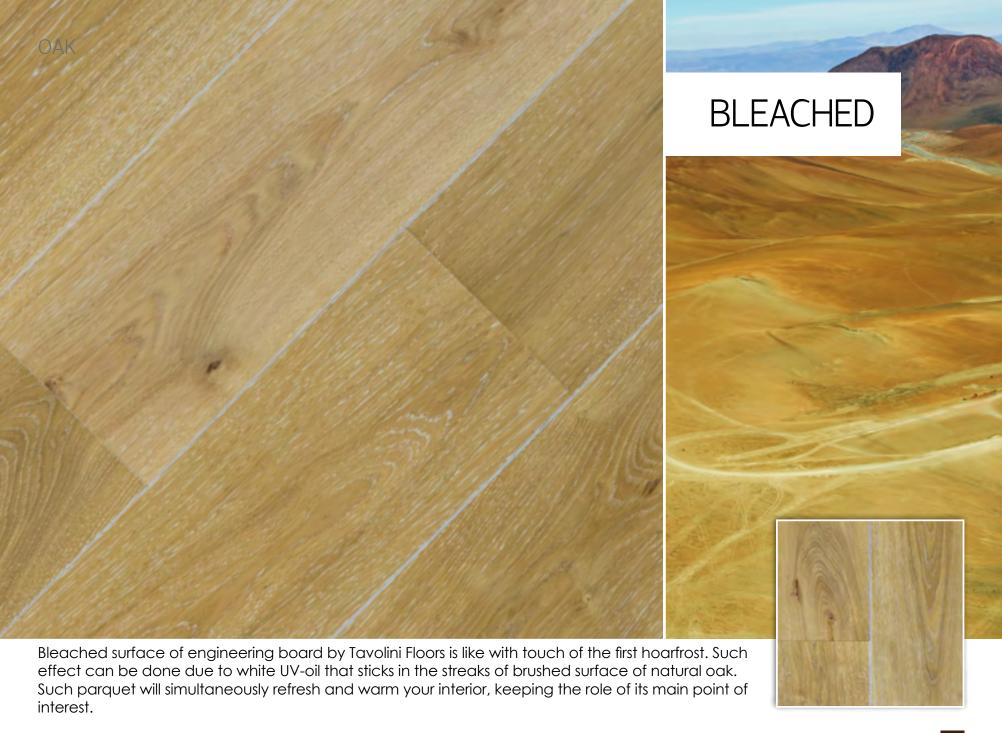

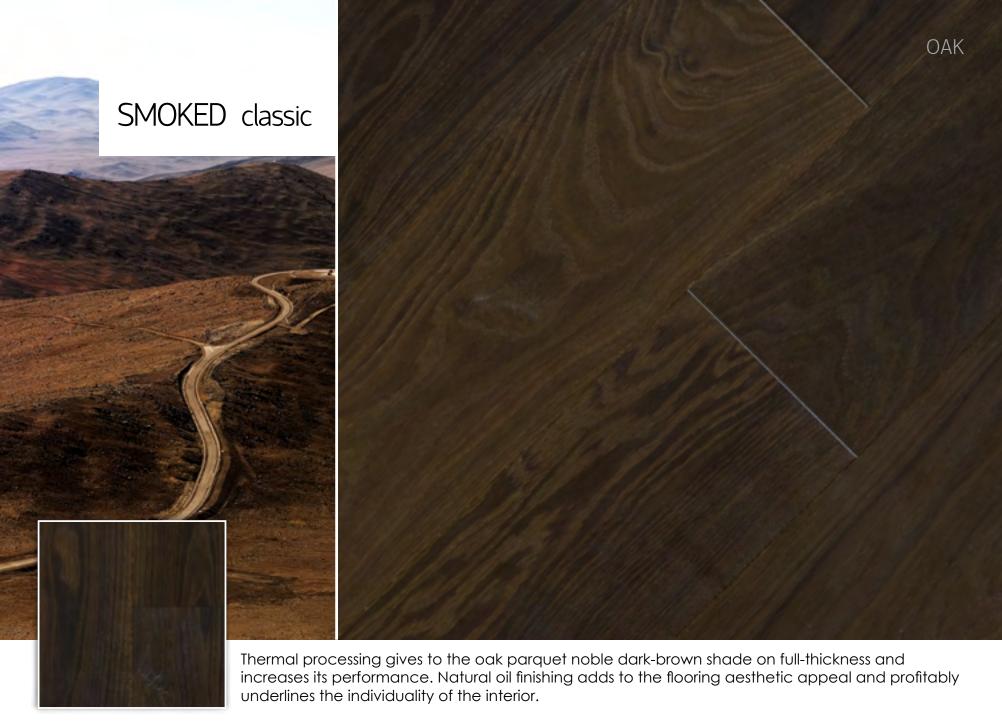






IN THE COLOR


ofemotions


EXCIISIVE

color palette of solid and engineering boards by Tavolini Floors is as diverse as spectrum of human emotions. From light happiness and sunny smile to hot passion and love, from light autumn melancholy with the touch of patina to all solemnity of dark shades. Our life is a caravan of emotions each of which you can test in our catalogue.


FEEL FREE AND MAKE A CHOICE!

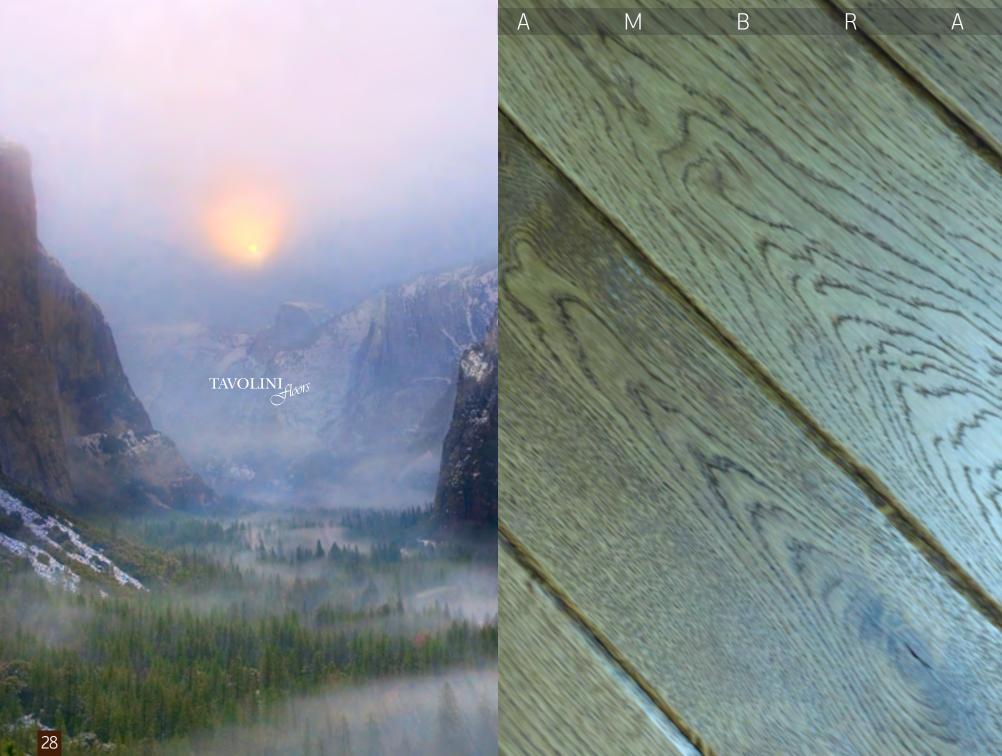

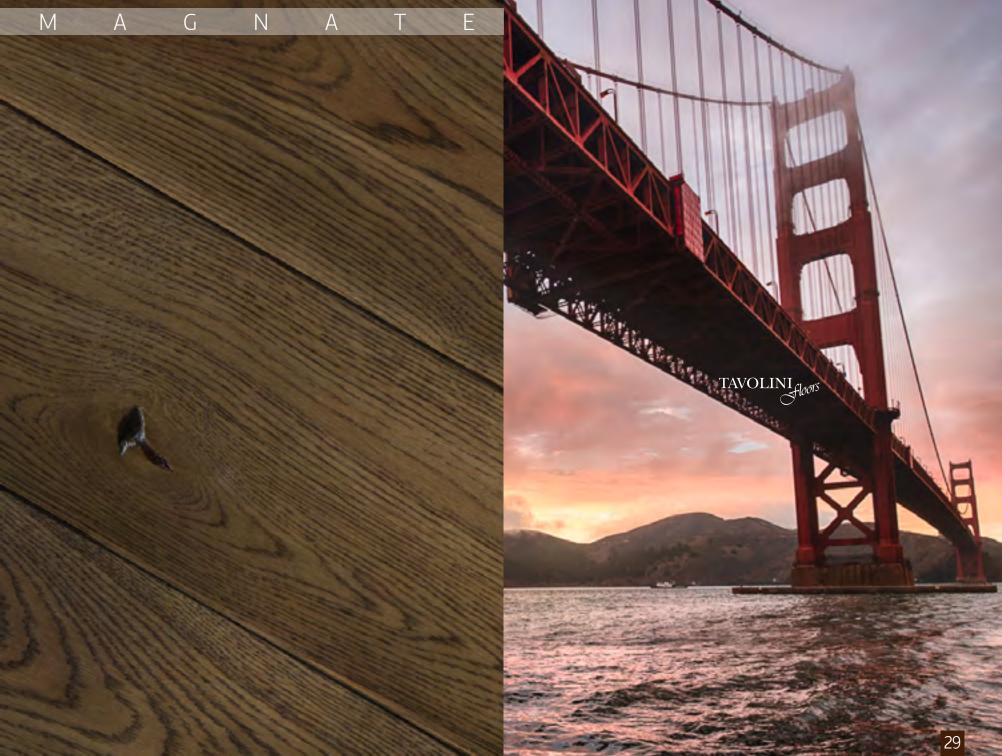

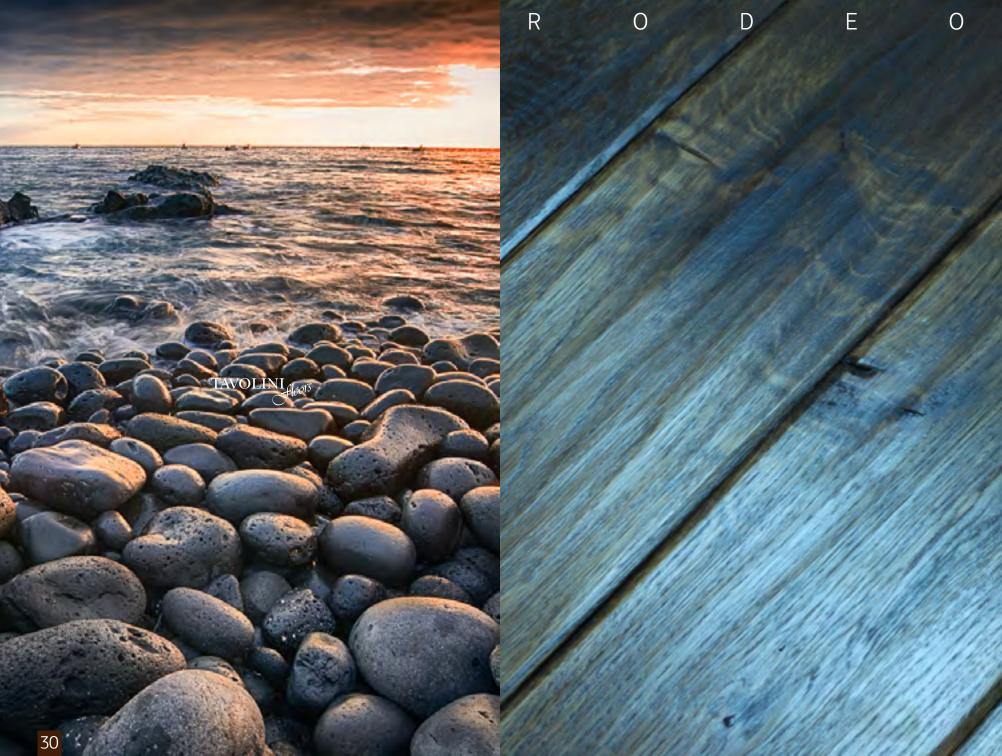



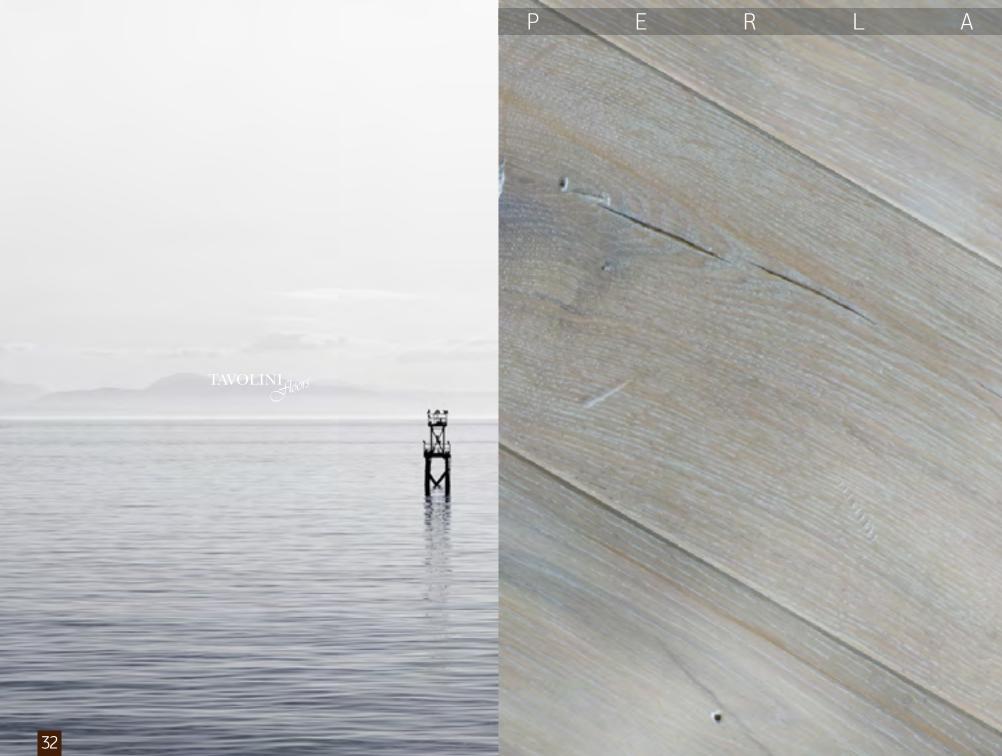





Grades of wood





Classic grade:

The surface without cracks and sapwood, standard knots up to 10 mm and pin knots up to 3 mm are allowed. Wood surface of natural color with wood grain.

Rustic grade:

Cracks, sapwood, heartwood are allowed. Knots without restriction. Wood surface of natural color with wood grain, filling with dark-brown filler.











HARDWOOD FLOORBOARDS



Advantages of hardwood floorboards in "Exclusive" Collection

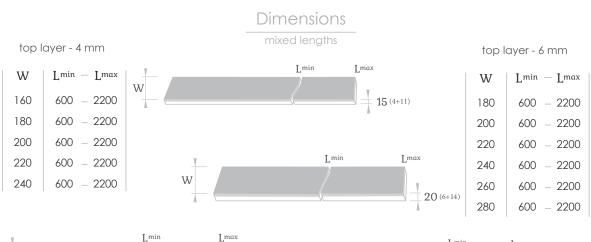

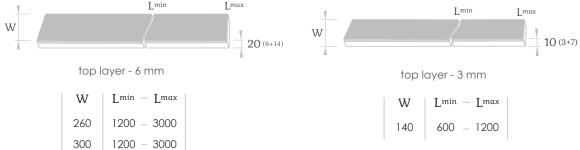


Dimensions

fixed Lengths, engineered

top layer - 4 mm

Н	W	L
15 (4+11)	90	500
15 (4+11)	120	600
15 (4+11)	140	700



top layer - 6 mm

Н	W	L
20 (6+14)	90	500
20 (6+14)	120	600
20 (6+14)	140	700

Finishing

UV-varnish Natural Oil UV-oil

Bevels

4-sides, machine 4-sides, manual No bevels

Grades of wood

Rustic Classic



Surface

Smooth

Brushed (deep and light prcessing)


Planed (manual processing)

Edge sawing


Open knots

Sawn & Brushed

Sawn (machine processing)





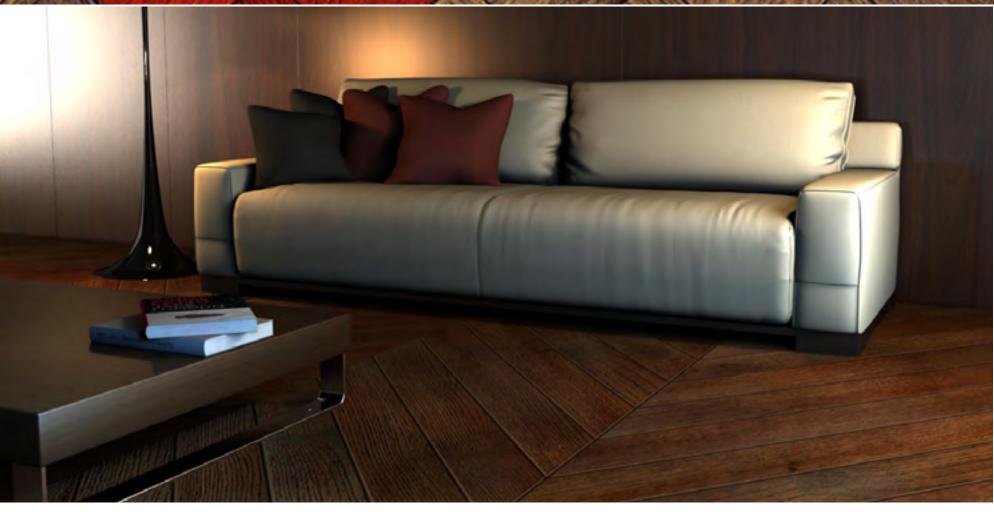


CHEVRON PARQUET







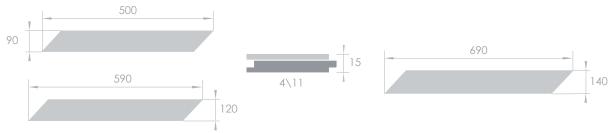



Custom sizes & cutting angles 30°, 60° – by request. Solid floorboards – by request.



39



Products characteristic of «EXCLUSIVE» collection by Tavolini Floors

- 2 grades of wood without distinction in color and more «rustic» character.
- The length of boards from 400 to 3000 mm, width from 90 to 300 mm, thickness from 10 to 20 mm.
- About 50 different colors, smoked, limed-colored processing. «Smoked» processing changes the color of wood through the whole thickness and improve operating abilities of the boards.



- Handcrafted stylized design of surface (deep and moderate scrapping (for you to choose) brushing, open knots, handcrafted bevel).
- Machine sawn processing (horizontal brushing) surface).
- The UV-varnish, UV-oil, natural oil types of finishing, open air-dryied boards.
- Operational stability and exclusive design.



14 popular decors and colors.

Species: oak, ash (smoked – by request).

Bevels: 4-sides.

Surface: brushed, smooth.

Finishing: natural oil, unfinished.

Structure: Solid, Engineered, Triple-oak.

"Triple-oak"- it's the made of 3 oak layers floorboards (middle layer is cross-rotated).

COLOUR



Grades of wood:




natural colors, without sapwood, sporadically allowed intergrown sound knots up to 5-10 mm.



natural wood colors, without sapwood. Intergrown sound knots up to 5-25mm allowed. Dead or cracked knots up to 5mm are filled.



natural colors. Sapwood allowed at no more than 20 % of the width and at no more than 30% of pieces. Sound knots up to 50-80mm acceptable. Cracked knots are filled.



differences in color, cramps, healthy sapwood allowed at no more than 25 % of the width.














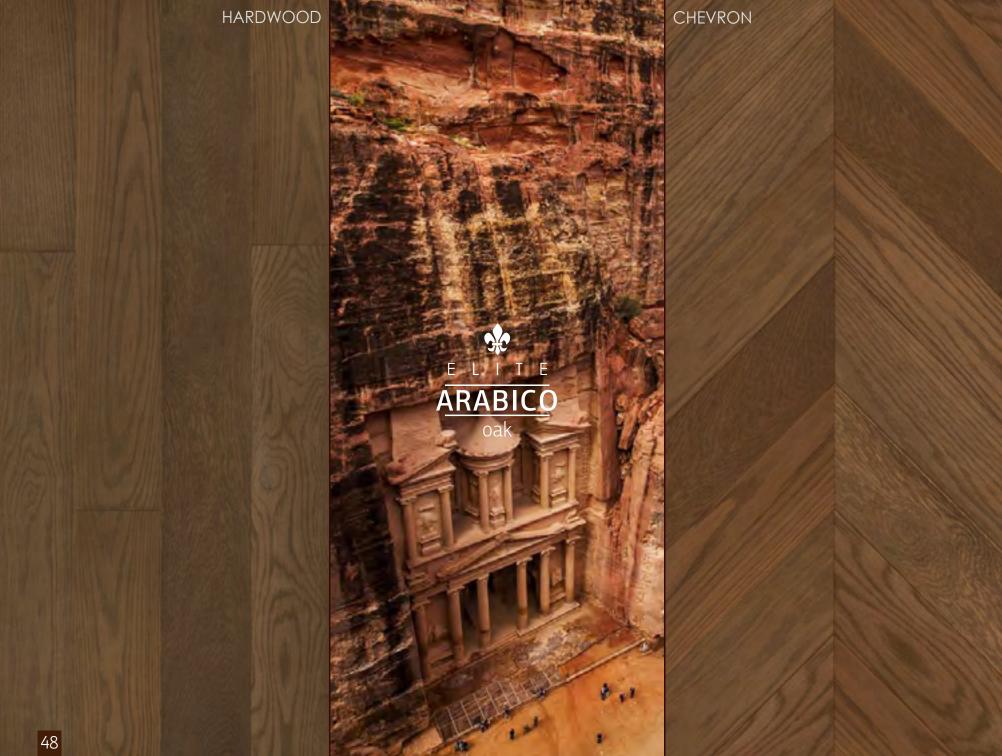


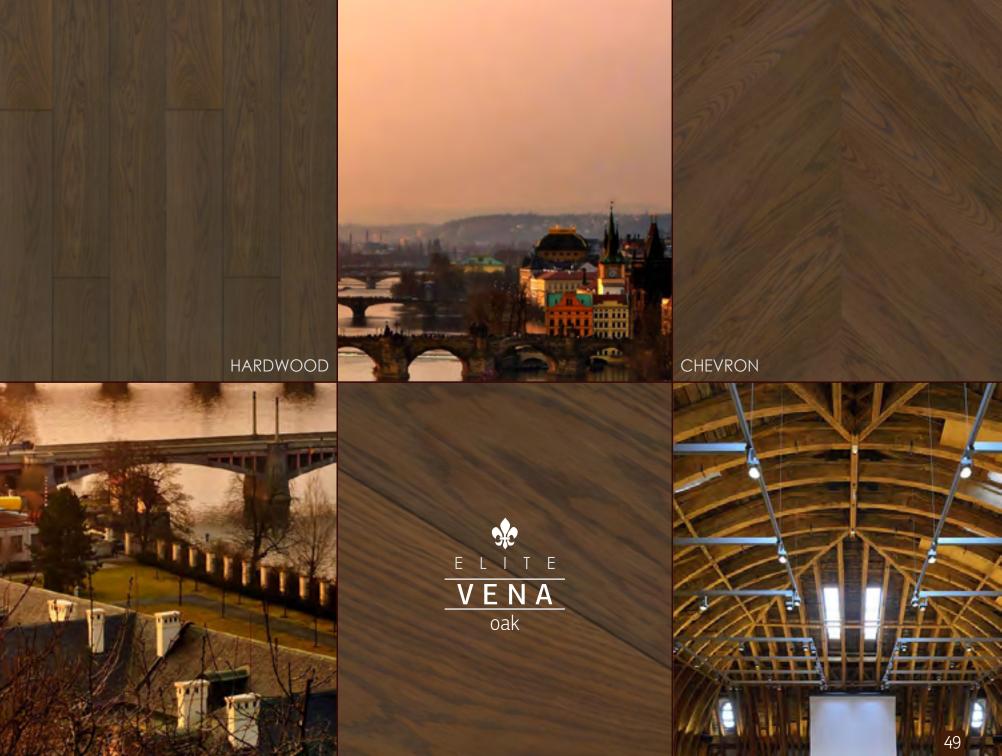



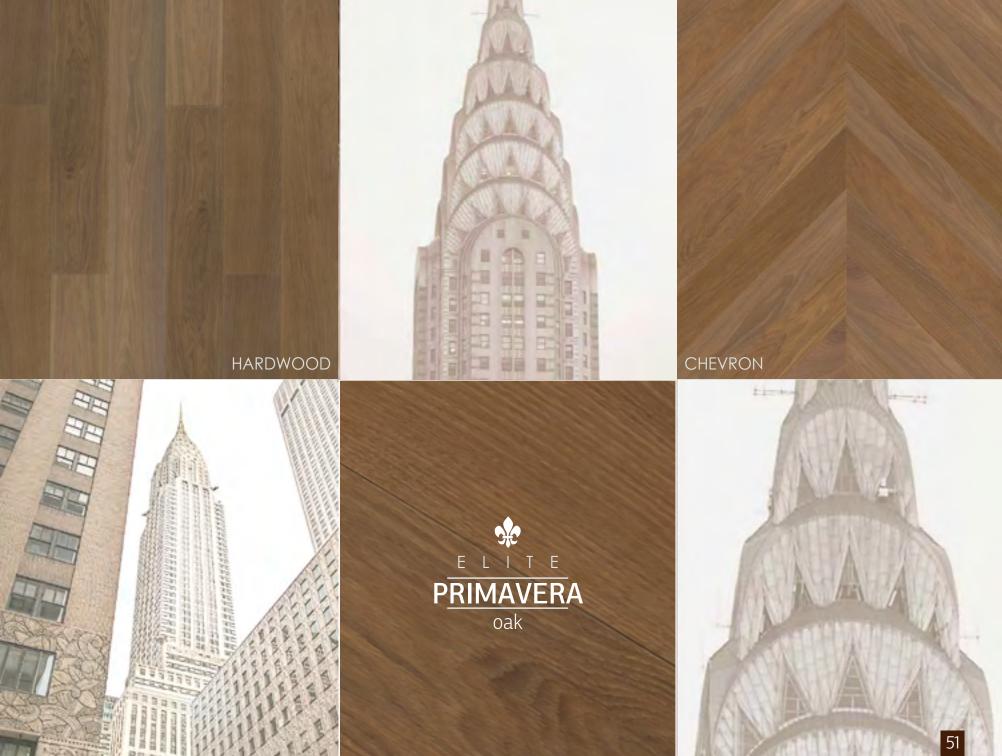



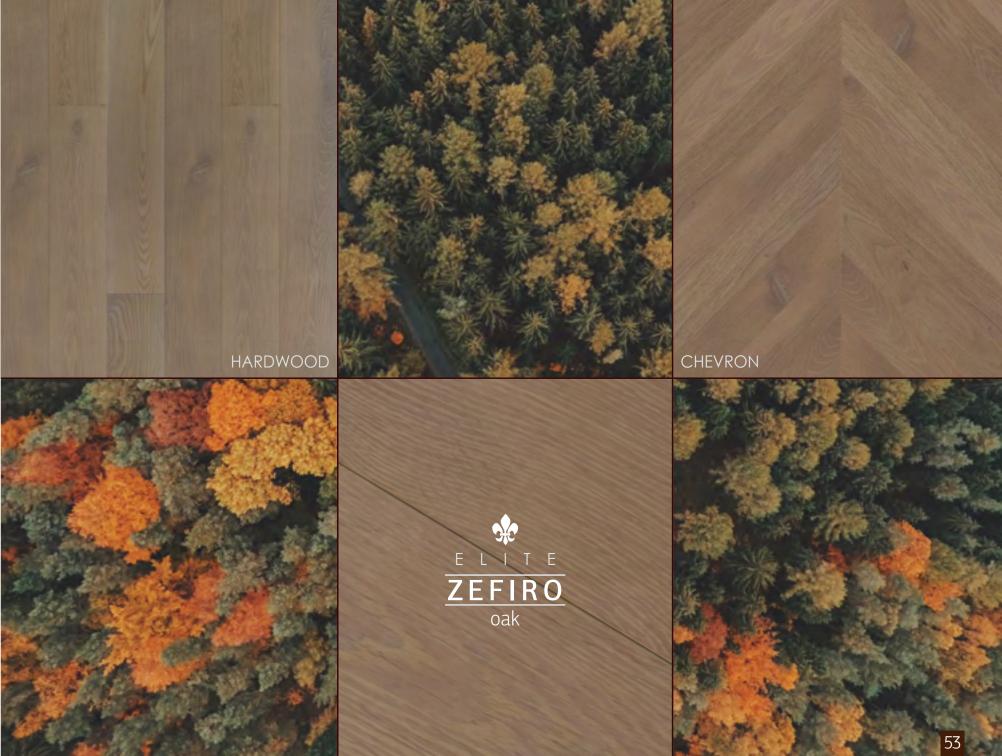










FLOORBOARDS

Dimensions

Solid boards



Triple-oak

- it's the made of 3 oak layers floorboards (middle layer is cross-rotated). Thickness of layers (top layer first): 3 or 4mm + 7mm + 2,7mm



w





Engineered boards

oak, top layer 3mm or 4mm





Finishing: natural oil or unfinished. 4-sides bevels.

OLID TRIPLE-OAK ENGINEERED

CHEVRO

58

Chevron Dimensions 45° angle

solid structure 790 engineered structure top layer 3 mm top layer 4 mm triple-oak structure top layer 3 mm

top layer 4 mm





Solid floorboards & chevron parquet, more than 27 colors & decors.


Surface: brushed, smooth.


Species: oak, ash, thermo-oak, thermo-ash.


Bevels: 4-sides.


Finishing: UV-varnish, natural oil, unfinished.




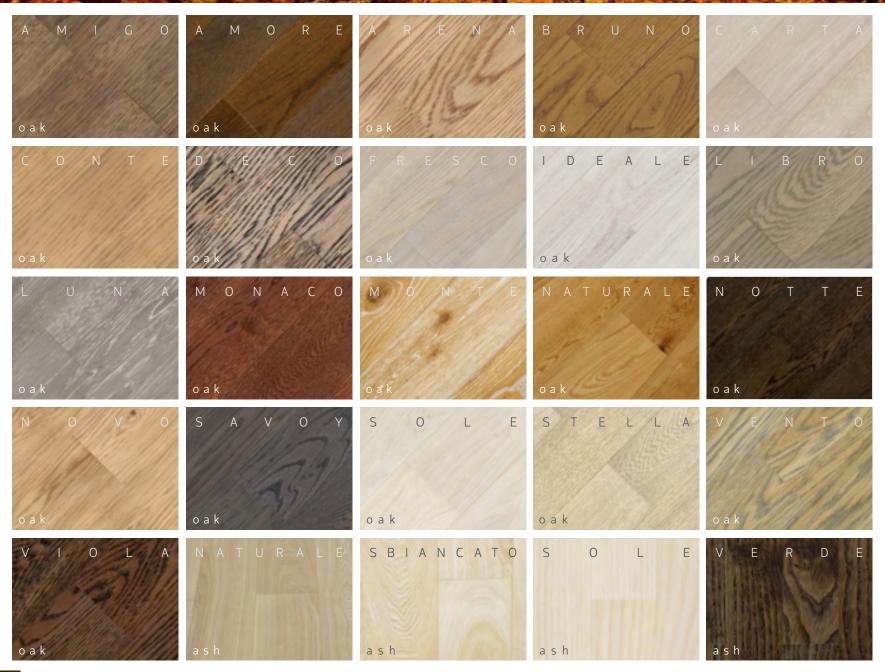


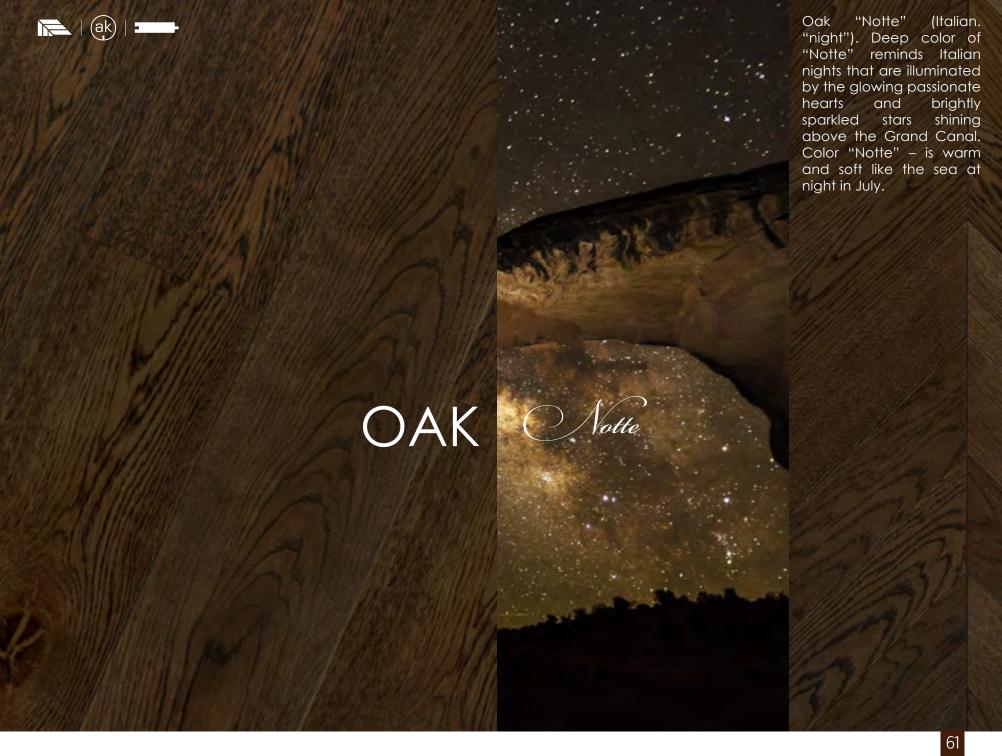

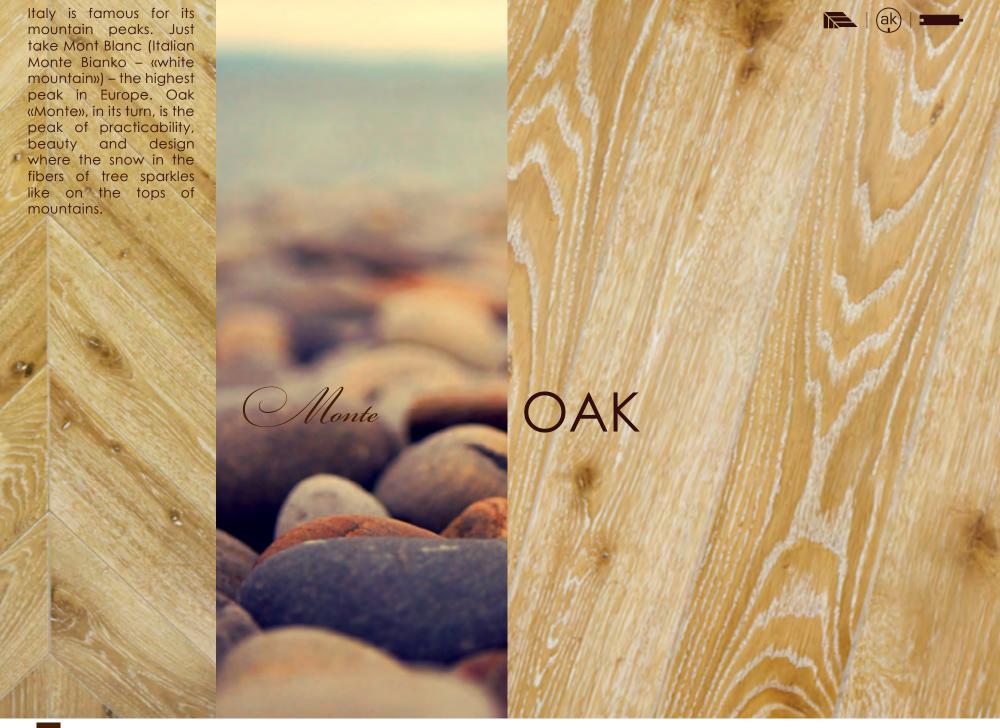


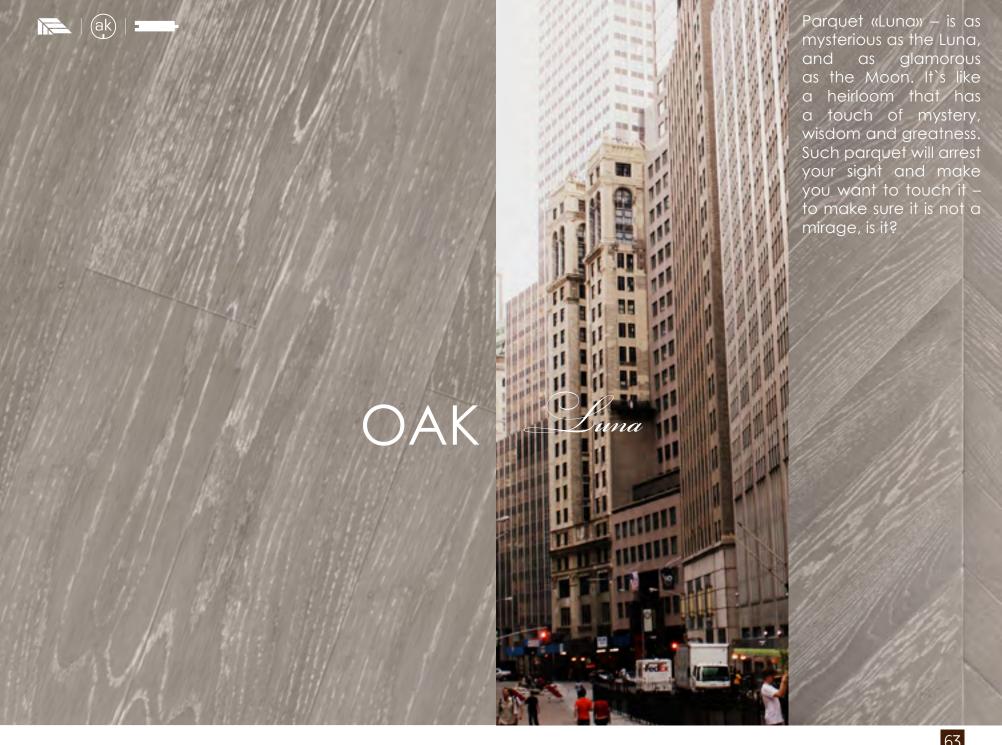

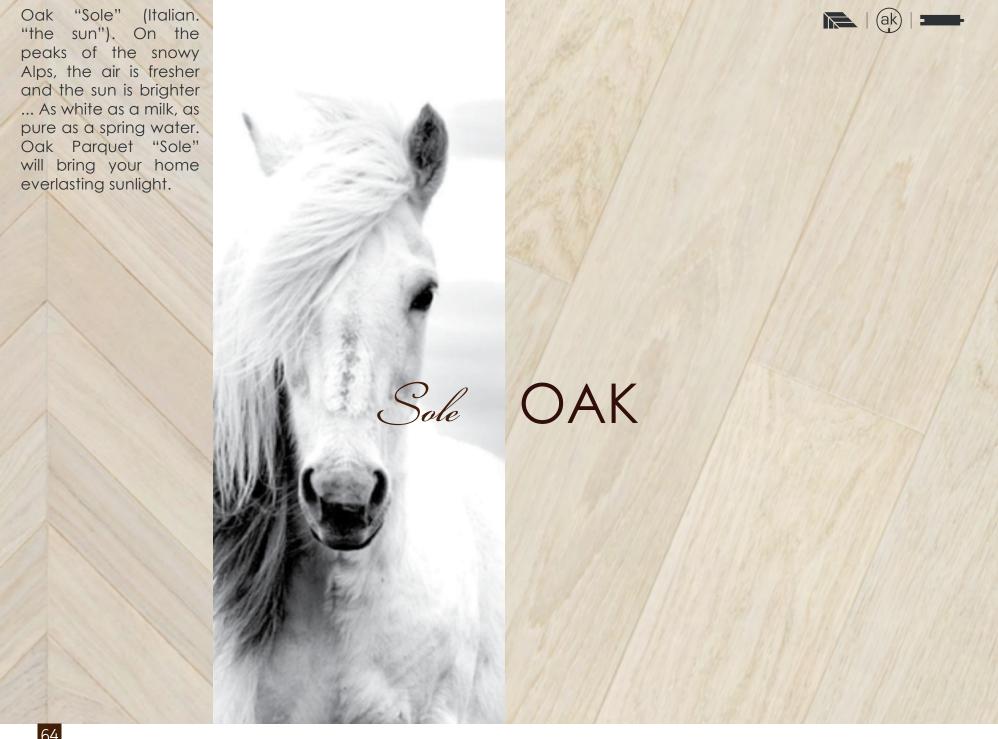


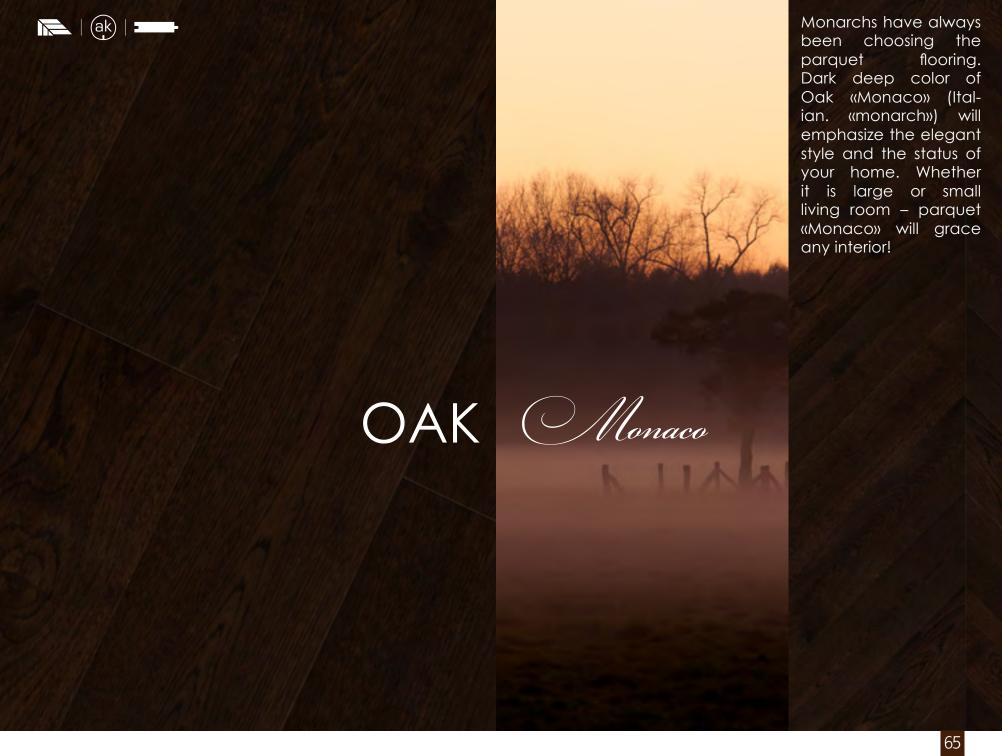



People say if you want | (ak) | = sheet. From Italian Oak «Carta» - is the leaf, even if a lot has passed. OAK Carta

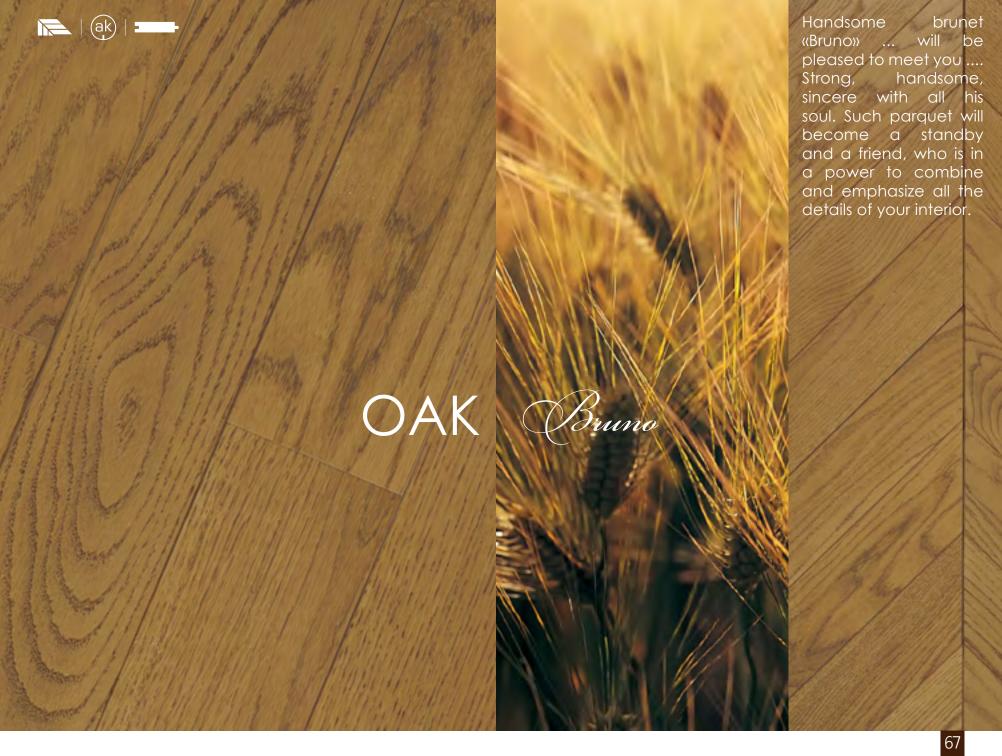



As tresh as a breeze, as cool as a morning dawn, – Oak «Fresco» will embreathe your home with the energy of youth and the new life. It will be pleasant to work and relax in such interior. In fact, everything is so simple, when your heart is full of coziness and light.

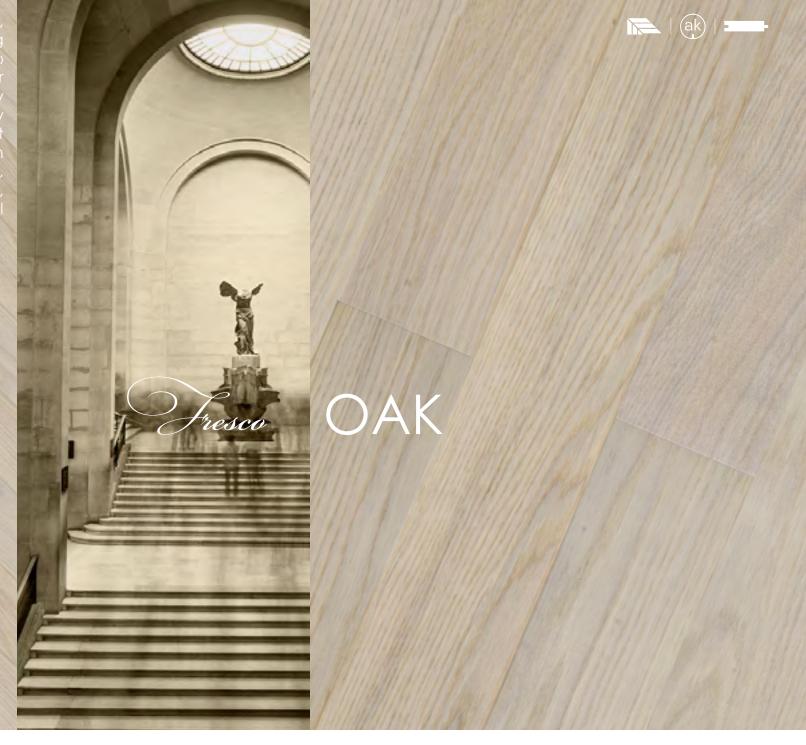


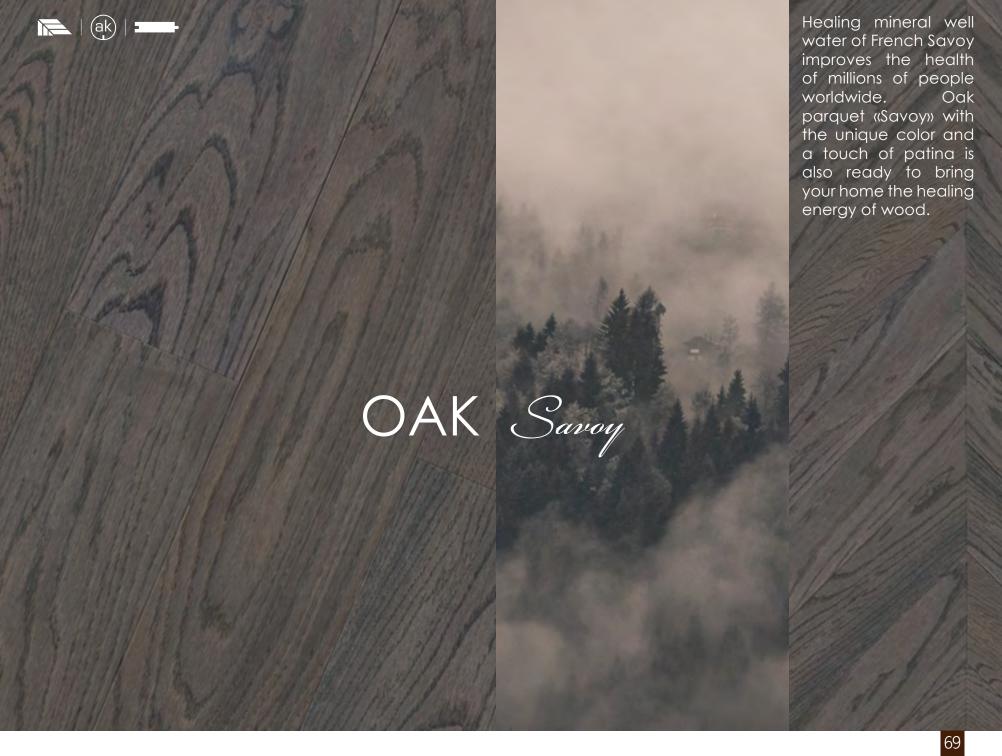


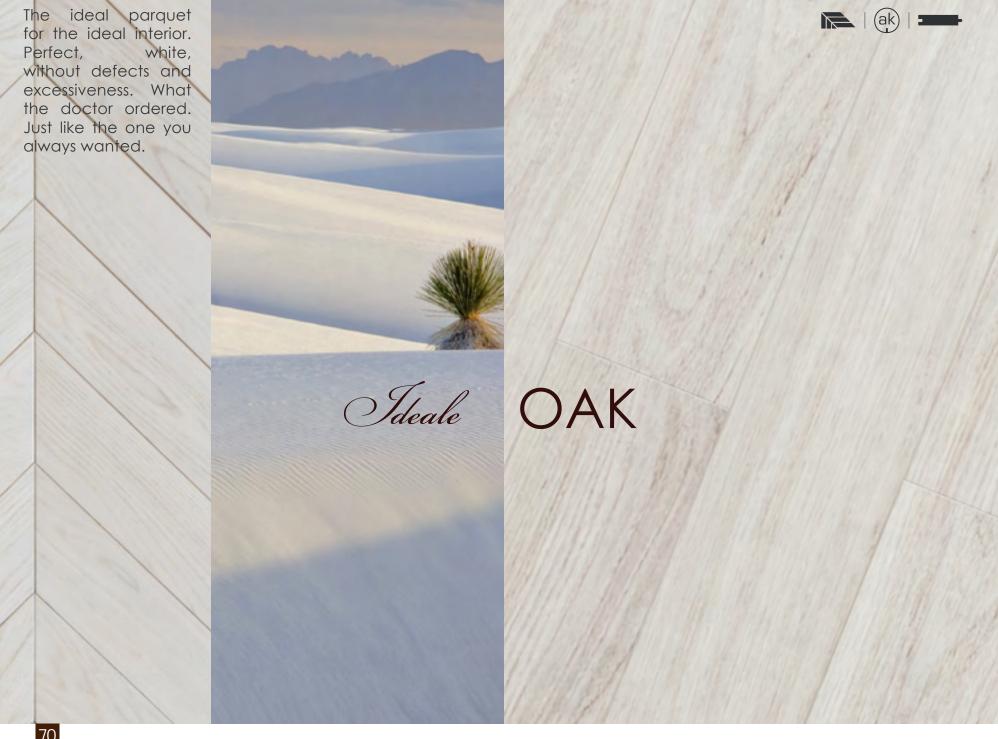


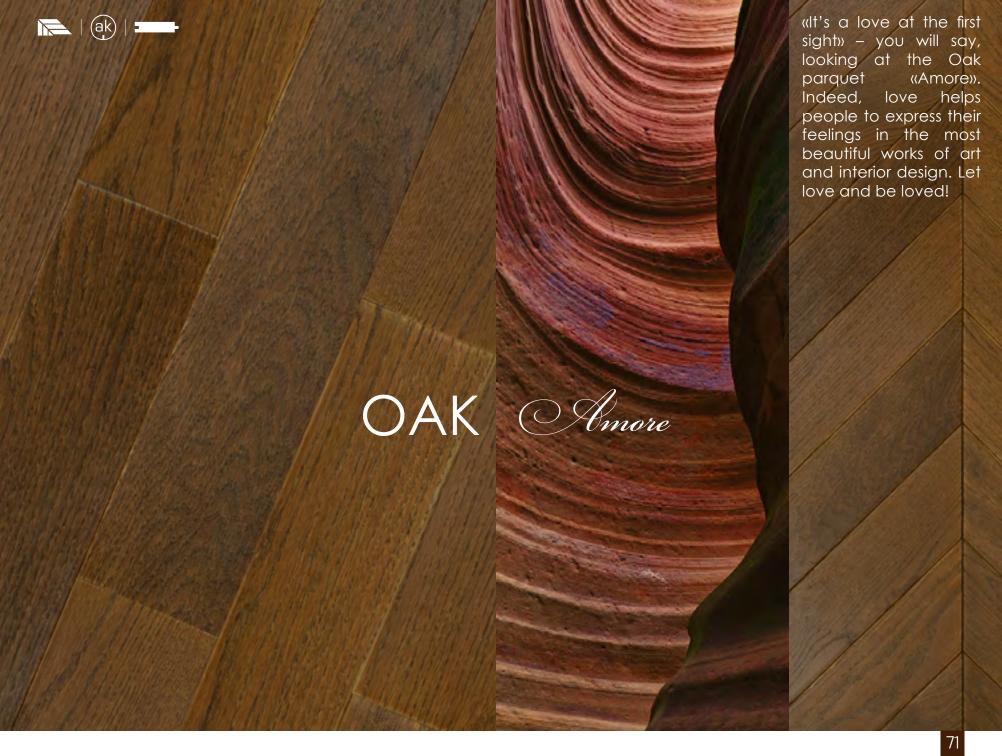


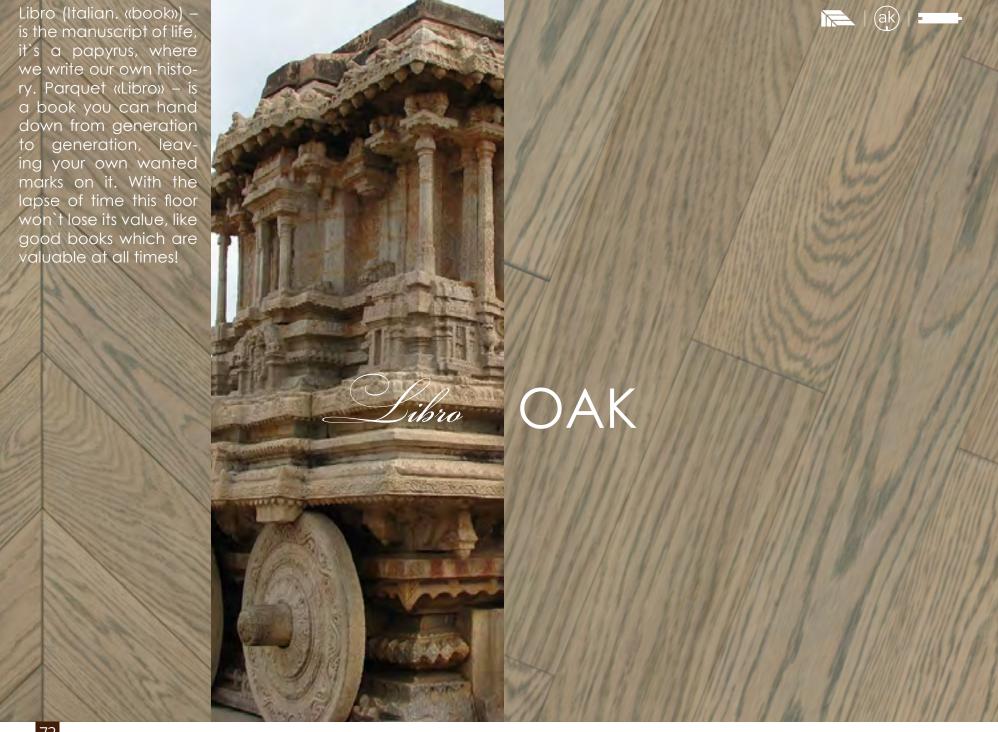


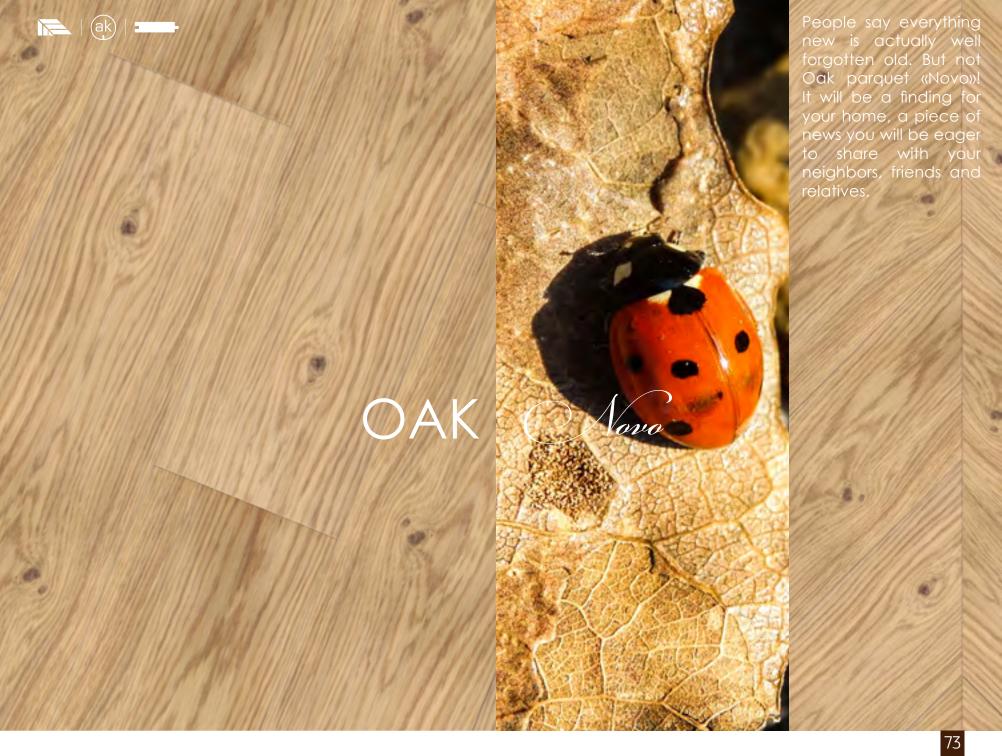

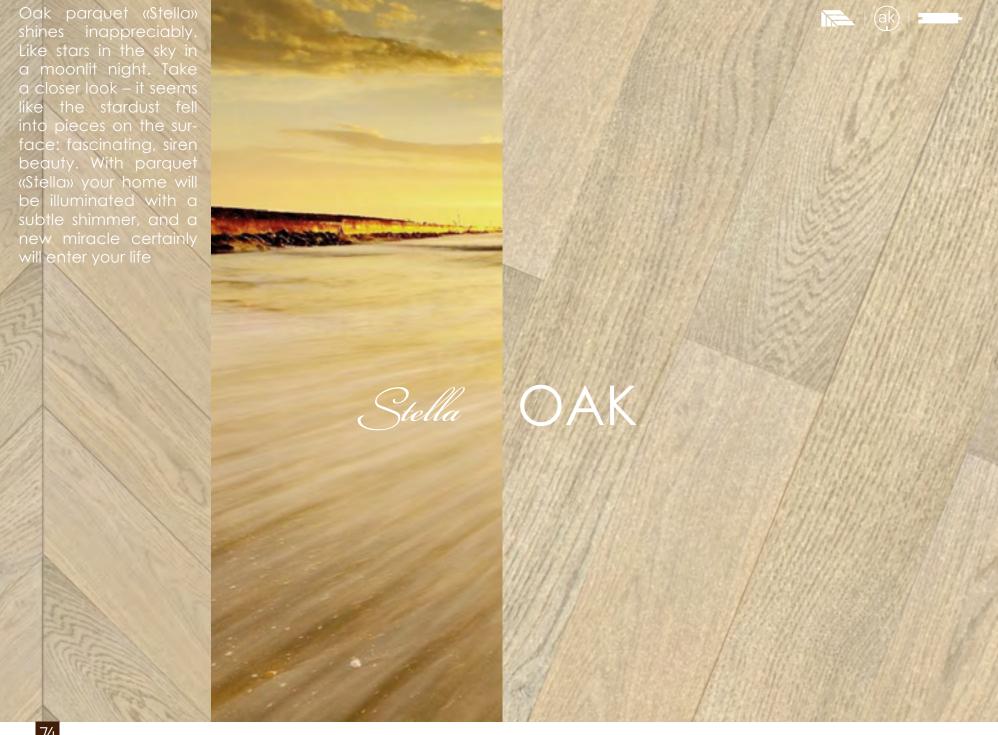


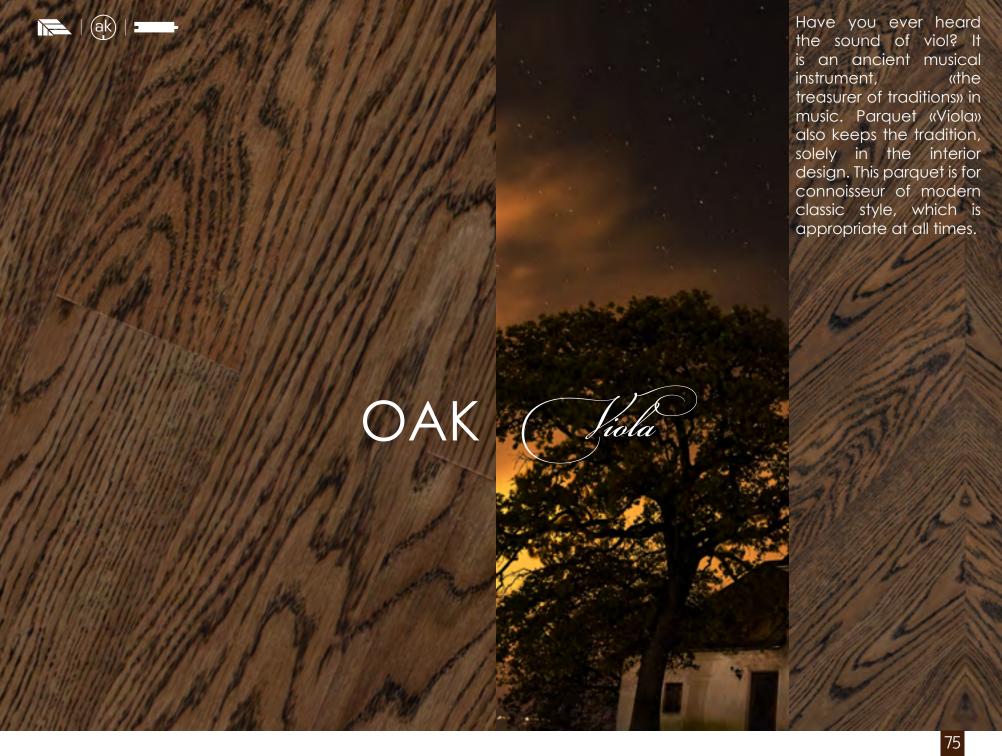


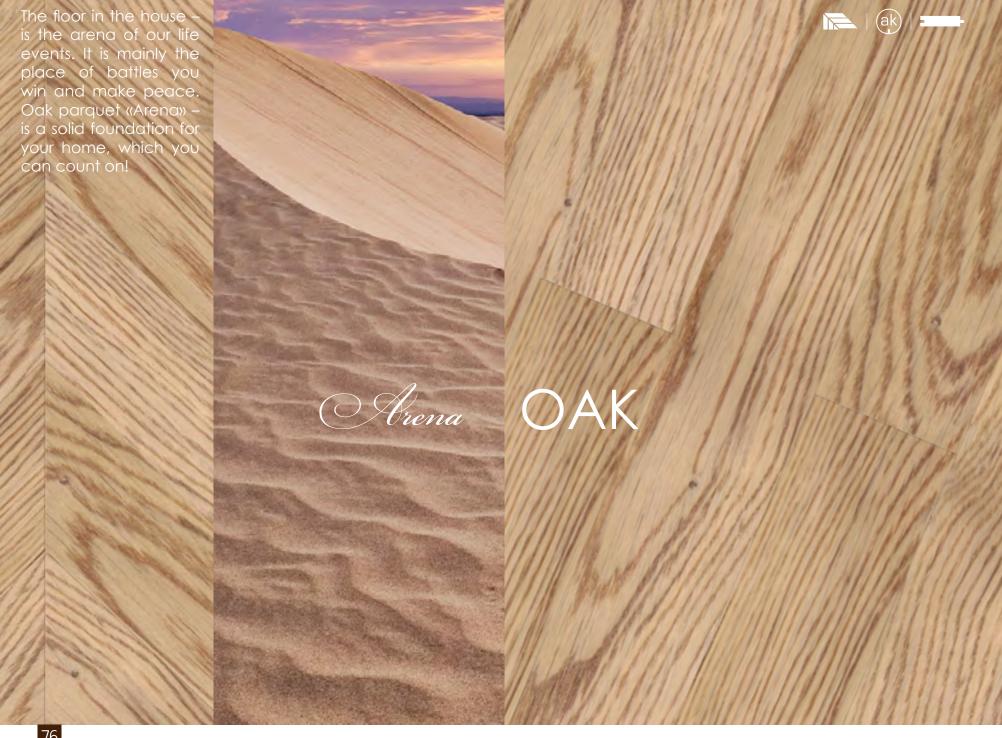


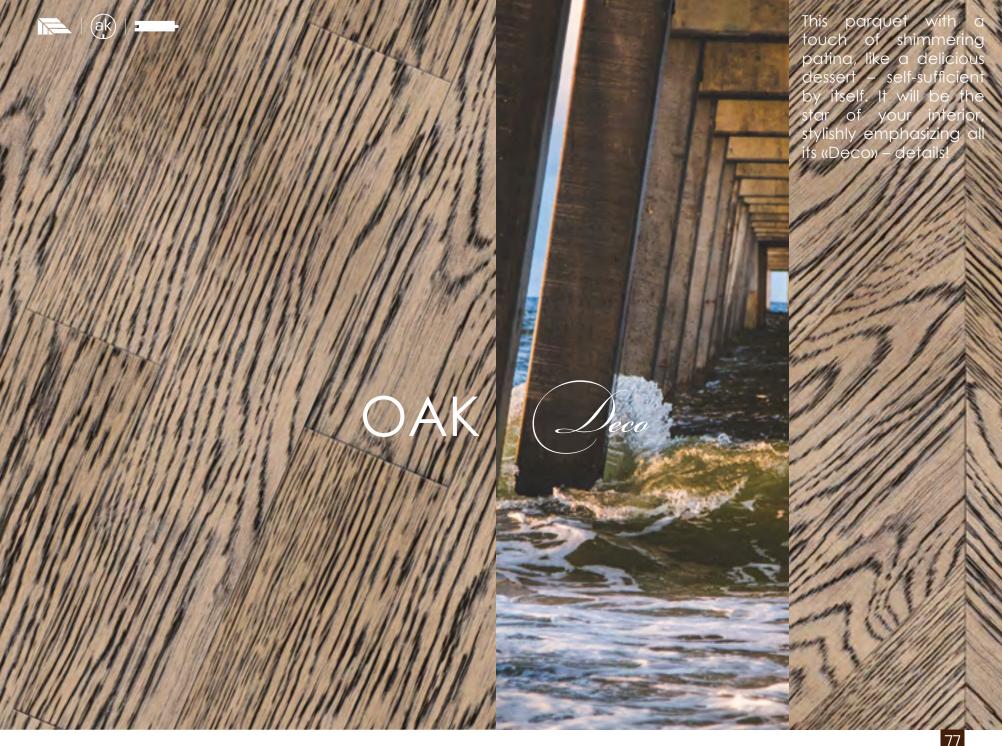



Like the wind playing with the sand on the seashore ...Oak «Vento» (Italian. «wind») – is as dynamic and warm as the evening breeze, and as playful and unpredictable as the wind from the sea. It is simultaneously refreshing and warm. Having this floor, you will always feel comfortable.

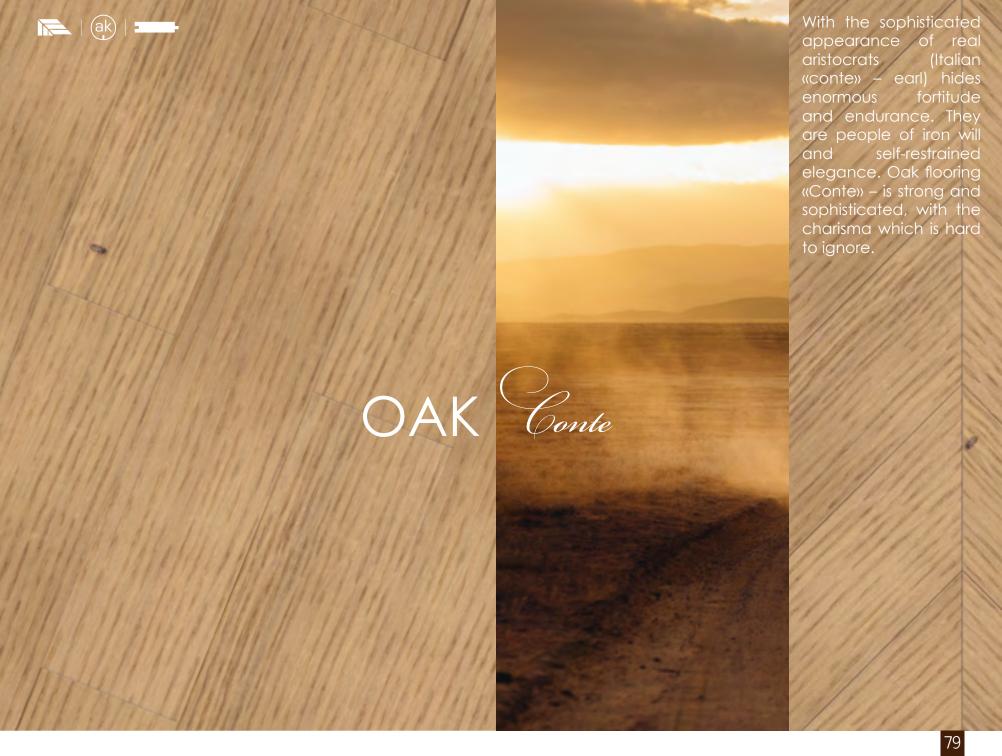


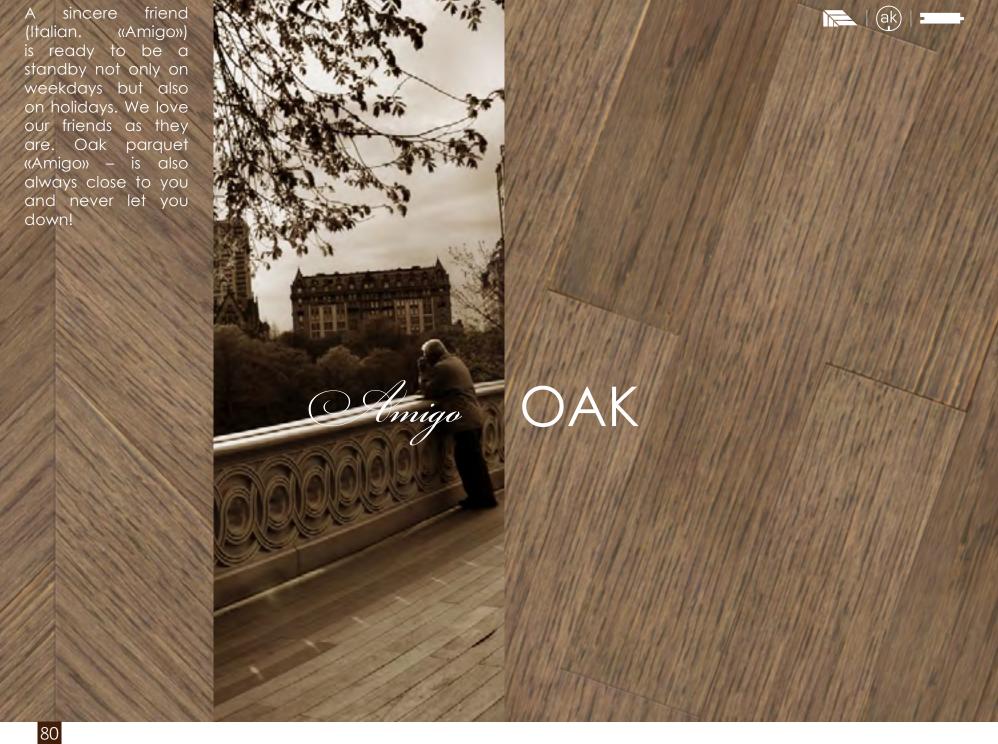


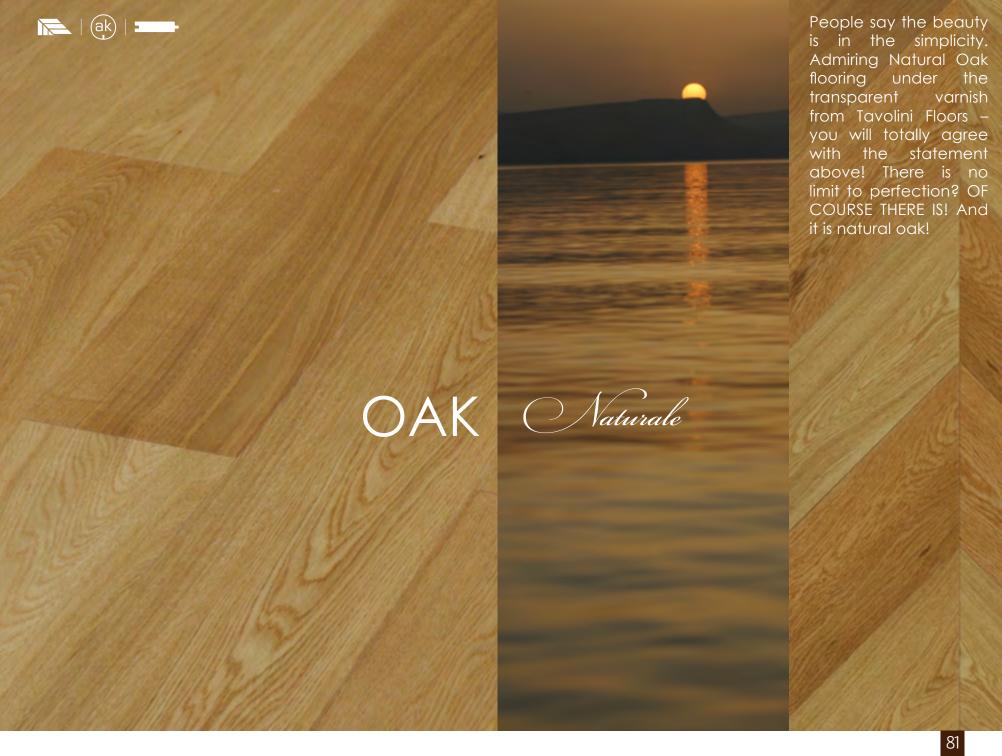

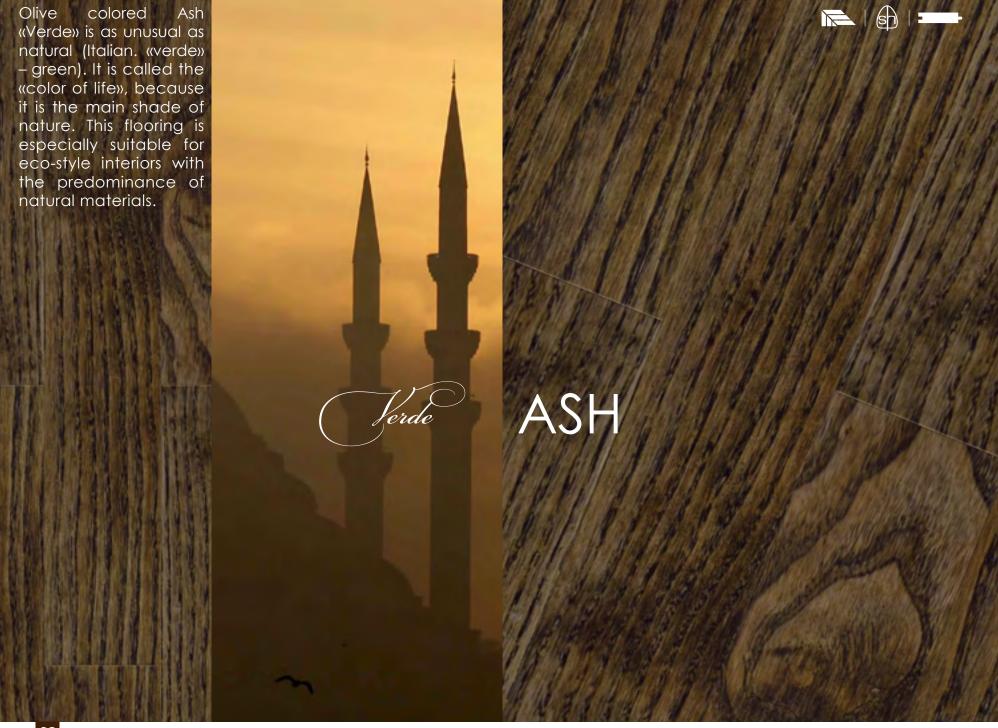

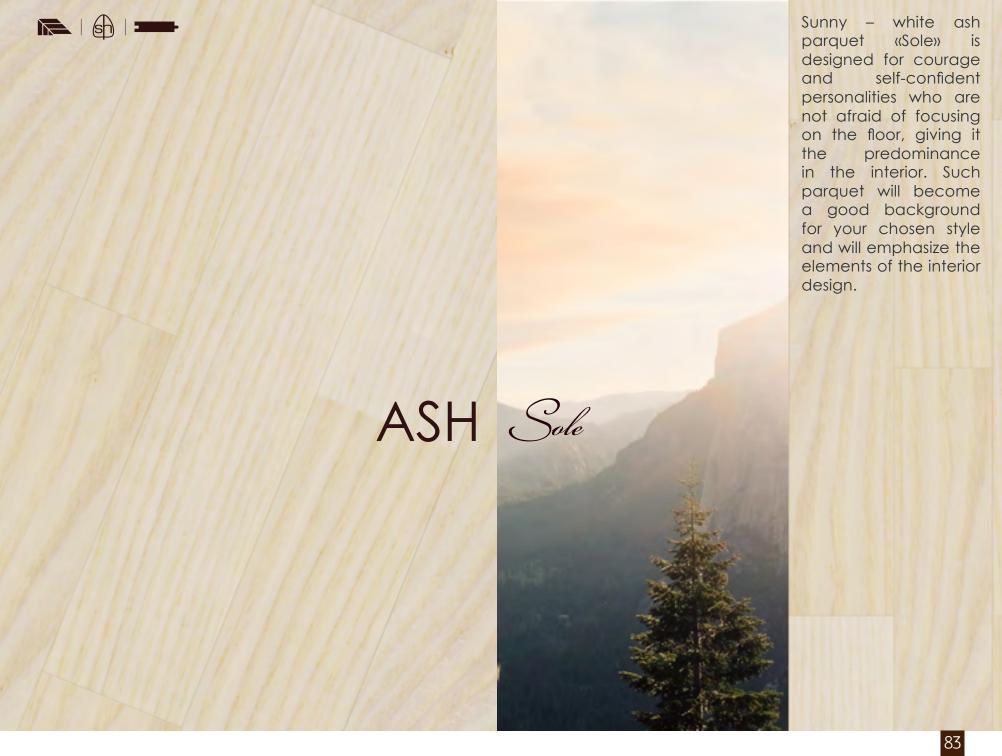

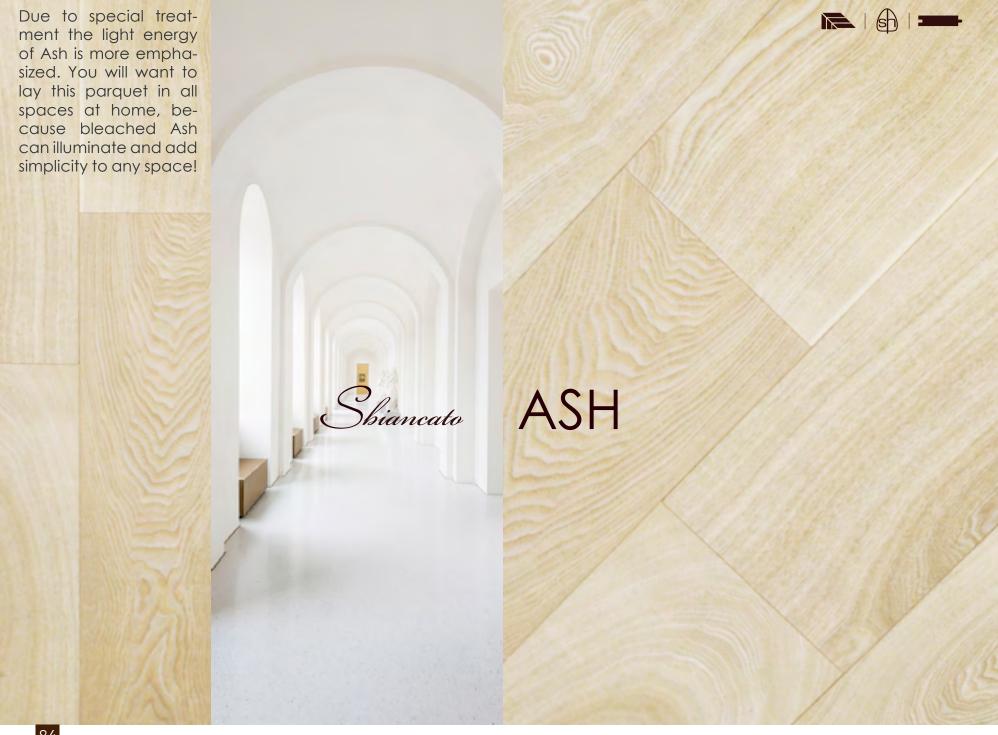


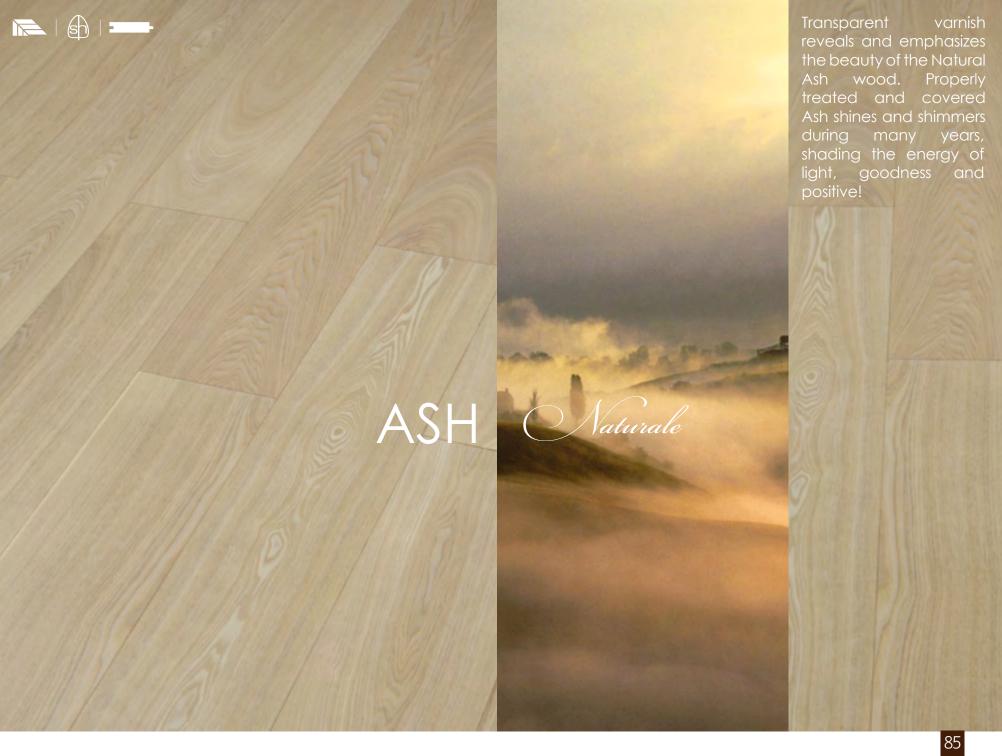



EXQUISITE SENSATIONS

a touchable comfort

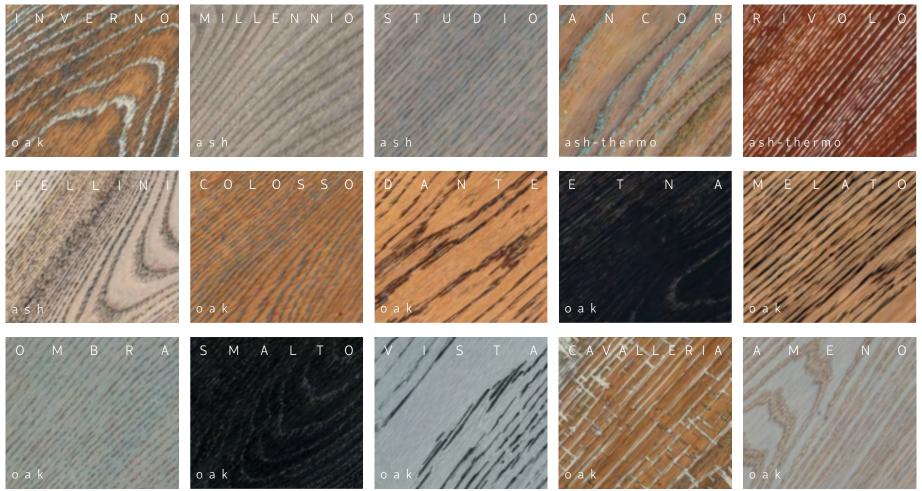

Grades of wood

Extra


wood of a relatively unitary natural color, various grain. Acceptable sound and intergrown knots – up to 6 mm. Permitted sound sapwood on the left side, does not go through the using layer. Checks and shakes are not permitted. Medullary ray or glance, are acceptable.

Medium

wood of a natural color, various grain. Sound and intergrown knots – up to 10 mm, unsound knots up to 5 mm. Permitted sound sapwood on the left side going through the using layer without the face layer. Checks of a 1mm depth and shallow shakes are permitted. Medullary ray or glance are acceptable.

Provence

various color and grain wood. Permitted sound and intergrown knots and knots aggregation to 25 mm. Acceptable sound sapwood and medullary ray on the right side, checks of a depth to 1mm. Only shallow shakes permitted.







Grades of wood

ASH

Crystal



laths of soft colors in shades of bright ash. Permitted sound knots up to 3 mm in diameter. Sound sapwood and checks do not occur.

Decent



permitted sound knots up to 18 mm diameter and black knots to 20 mm diameter. Colors in the classification of sorts are excluded. Surface cracks with a depth of 1 mm. Cracks leading permissible shallow and not very visible.

Prime



laths of soft colors in shades of dark ash. Permitted sound knots up to 3 mm in diameter. Sound sapwood and checks do not permitted.

Extra



laths of different colors characteristic of ash wood. Permitted sound knots up to 5 mm in diameter at the level of grain. Sound sapwood does not occur. Acceptable shallow surface cracks (up to 0.5 mm deep) occasionally.



Grades of wood

Decent

Wood of a various colour and grain Permitted sound and intergrown knots and knots aggregation to 10mm in diameter, checks of a depth to 1 mm. Shallow shakes permitted.



<u>Imperial</u>

Tones colour schemes and slightly knotty wood graning free from knots.



Dimensions

thermo ash

Н	W	Lmin Lmax		Lmin	Lmax	\\/
15\16	100	400 - 1400				
15\16	120	600 - 2000	≥	')	Н
15\16	1.50	600 - 2000				




S O L I D W O D

Solid wood floors had been laid down long before the parquet blocks or other type of parquet was appeared. Due to the solidity of the board through the entire thickness (consists of one piece of wood), solid wood has always been considered as a scent of respectability and good taste. With proper care and maintenance the solid wood will serve from 50 to 200 years and like a family treasure, it can be handed down from generation to generation.

SOLID FLOORBOARDS

DIMENSIONS

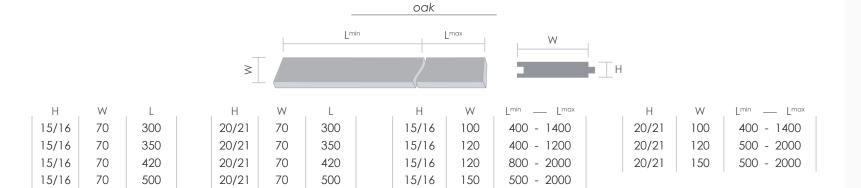

ash/thermo-ash				
Н	W	L ^{min} — L ^{max}		
15/16	100	400 - 1400		
15/16	120	600 - 2000		
15/16	150	600 - 2000		

	thermo-oak			
Н	W	Lmin Lmax		
15/16	120	500 - 2000		

Finishing	Surface	Bevel	Species
UV-varnish Natural oil Unfinished	Brushed Smooth	4-sides	Oak Ash Thermo-oak Thermo-ash

Oak



Ash



Chevron parquet



Solid floorboards







CHEVRON


The "chevron" laying was originated many centuries ago in France. The first samples of such laying were appeared in the XVI century, while the first written records of it were found in the description of the Palace of Versailles. Today, "chevron" is again in the peak of popularity – its elegant sophistication has already conquered many countries.

"Chevron" – is an advanced type of the "Herringbone pattern". To produce such kind of parquet boards, the ends of the boards are cut in a special way. At the junction, they do not form a zigzag but a straight line. It is fashionable type of flooring, which will never lose its relevance.

CHEVRON PARQUET DIMENSIONS

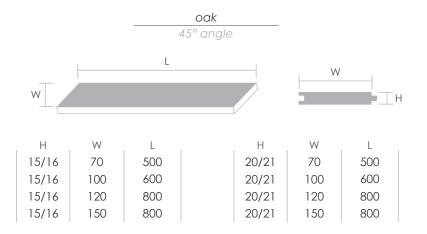





	0.0			
45° angle				
Н	W	L		
15/16	100	600		
15/16	120	800		
15/16	150	800		

ash



Oak



Ash



Chevron parquet

description



Solid floorboards



